



Big Dipper



somos@laserdreams.com.ar

ILUMINACION

▶ 2026

CLB260

260W Compact Beam



Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 270W (CLB260) / 320W (CLB260-O)
 Light Source: RUI 230W / OSRAM SIRIUS HRI 251W
 Color Temperature: 7800K
 Beam Angle: 2.8°
 Movement: Pan: 540° / Tilt: 270°; Pan/Tilt Resolution: 16 bit
 Dimmer/Shutter: Smooth dimming from 0-100%;
 strobe effect with variable speed
 Color Wheel: 1* color wheel with 11 colors plus open and rainbow effect
 Gobo Wheel: 1* static gobo wheel with 13 gobos plus open
 Prism plate: 1*8-facet prism, rotation. 1*independent frost. Fixed focus
 Control Mode: DMX512 / Auto / Sound / Master-slave / RDM
 DMX Channels: 12CH
 Display: LCD Color display
 Carton Size: 560x460x340mm (2Pcs)
 N.W./G.W.: 12.6/17Kg

技术参数:


电压: AC100V-240V 50-60HZ
 额定功率: 270W (CLB260) / 320W (CLB260-O)
 光源: 国产230W灯泡/OSRAM SIRIUS HRI 251W 灯泡
 色温: 7800K
 光束角度: 2.8°
 水平扫描: 540°(16 bit精度扫描)
 垂直扫描: 270°(16 bit精度扫描)
 调光: 0~100%线性调光
 颜色盘: 11+白光, 半色效果, 色片可任意定位, 带双向旋转的彩虹效果
 图案盘: 13+白圆, 带图案抖动和图案任意定位功能
 棱镜盘: 1棱镜盘, 8棱镜
 控制模式: DMX512 / 自走 / 声控 / 主从联机 / RDM
 通道: 12通道
 显示屏: 液晶
 外箱规格: 560x460x340mm (2台)
 净重/毛重: 12.6/17千克

RUI 230W:

Distance (m)	8	10	15	20
illumination (Lux)	261160	168418	76372	42040
2.8°				
Diameter (m)	0.385	0.495	0.74	0.985



OSRAM SIRIUS HRI 251W:

Distance (m)	8	10	15	20
illumination (Lux)	275600	178985	80303	46131
2.8°				
Diameter (m)	0.385	0.495	0.74	0.985

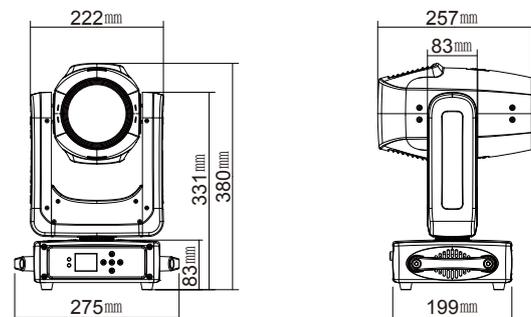

LB150

100W Beam

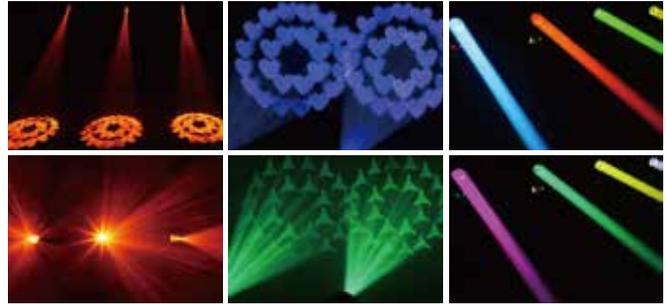



Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 150W
 Light Source: 100W COB white light source
 Beam Angle: 1.72°
 Control Mode: DMX512 / Auto / Sound / Master-slave
 Color: 1 color wheel: 11+open, half-color effect, the color filter can be positioned arbitrarily, with two-way rotating rainbow effect
 Gobo: 1 fixed gobo wheel: 11+open, with gobo shaking and arbitrary gobo positioning functions
 Prism plate: 1 prism plate, 6+12 prisms
 DMX Channels: 12CH
 Color temperature: 10000~12000K
 Pan: 540°; Tilt: 270°
 Carton Size: 500x350x295mm (2Pcs)
 N.W./G.W.: 9/10.9Kg

技术参数:


电压: AC100V-240V 50-60HZ
 额定功率: 150W
 光源: 100W COB 白光光源
 光束角度: 1.72°
 控制模式: DMX512 / 自走 / 声控 / 主从联机
 颜色: 1个: 11+白光, 色片可任意定位, 带双向旋转的彩虹效果
 图案: 1个: 11+白圆, 带图案抖动和图案任意定位功能
 棱镜: 1棱镜盘, 6+12 棱镜
 通道: 12通道
 色温: 10000~12000K
 水平: 540°; 垂直: 270°
 外箱规格: 500x350x295mm (2台)
 净重/毛重: 9/10.9千克

illumination




LB100

100W Beam



illumination

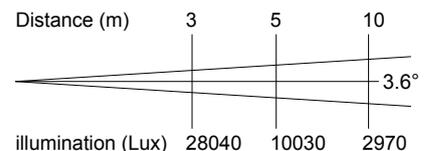

Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 120W
 Light Source: 100W LED
 Beam Angle: 3.6°
 Control Mode: DMX512 / Auto / Sound / Master-slave
 Color: 7+White; Gobo: 10; Prism plate: 8 prisms
 DMX Channels: 12/18/19CH
 Pan: 540°; Tilt: 270°
 Carton Size: 530x360x530mm (4Pcs)
 N.W./G.W.: 14.8/17.4Kg

技术参数:




电压: AC100V-240V 50-60HZ
 额定功率: 120W
 光源: 100W LED
 光束角度: 3.6°
 控制模式: DMX512 / 自走 / 声控 / 主从联机
 颜色: 7+白光; 图案: 10; 棱镜: 8棱镜
 通道: 12/18/19通道
 水平: 540°; 垂直: 270°
 外箱规格: 530x360x530mm (4台)
 净重/毛重: 14.8/17.4千克

LB295 / LB295R

295W Beam / +LED Strip



NEW

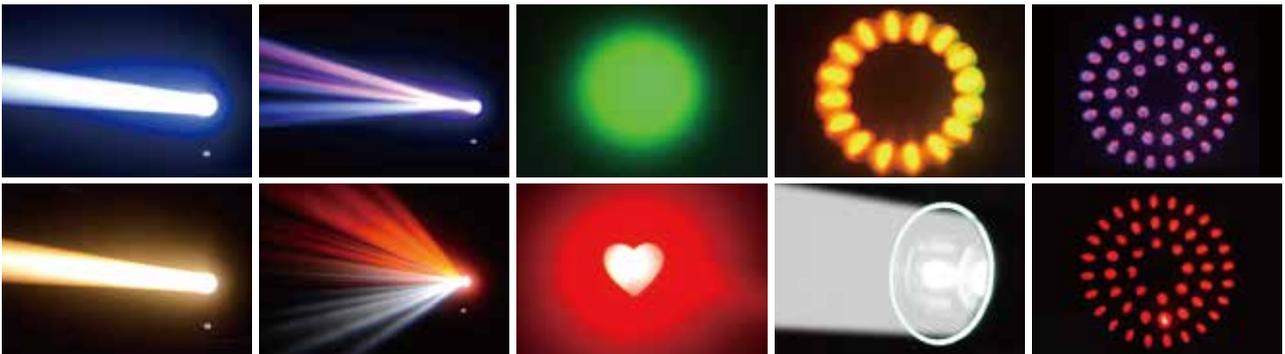




Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 450W/460W
 Light Source: 295W/295W +15W (5050 RGB LED)
 Beam Angle: 2.2°
 Control Mode: DMX512 / Auto / Sound / Master-slave
 Color: 14+White
 Fixed Gobo: 11+3 glass Gobo+White
 Prism plate: 8+48 Prism
 DMX Channels: 16CH/18CH
 Color Temperature: 7500K±500K
 Luminous flux: 4500 lm
 Pan: 540°; Tilt: 270°
 Dimmer: 0-100% Linear dimmer
 Carton Size: 520x360x385mm (1Pcs)
 N.W./G.W.: 12.5/13.5Kg

技术参数:


电压: AC100V-240V 50-60HZ
 额定功率: 450W/460W
 光源: 295W/295W +15W (5050 RGB LED)
 光束角度: 2.2°
 控制模式: DMX512 / 自走 / 声控 / 主从联机
 颜色: 14+白光
 固定图案: 11+3个玻璃图案+白光
 棱镜: 8+48棱镜
 通道: 16通道(LB295)/18通道(LB295R)
 色温: 7500K±500K
 光通量: 4500 lm
 水平: 540°; 垂直: 270°
 调光: 0~100% 线性调光
 外箱规格: 520x360x385mm (1台)
 净重/毛重: 12.5/13.5千克

illumination

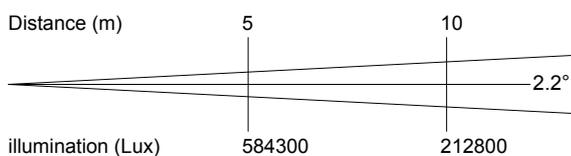


LB250R / LB260R

250W / 260W Beam+LED Strip

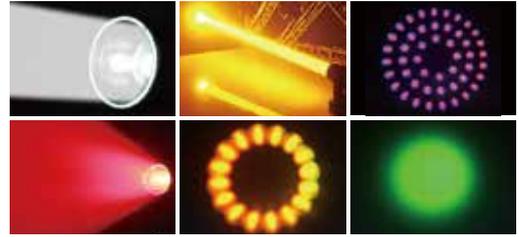

LB250 / LB260

250W / 260W Beam

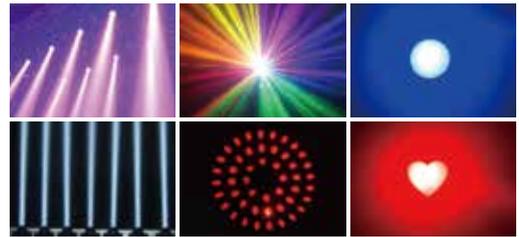



Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 340W (LB250R) / 350W (LB260R)
 330W (LB250) / 340W (LB260)
 Light Source: 250W+LED Strip:5.8W(5050 RGB LED) (LB250R)
 260W+LED Strip:5.8W(5050 RGB LED) (LB260R)
 250W (LB250) / 260W (LB260)
 Beam Angle: 1.9°
 Control Mode: DMX512 / Auto / Sound / Master-slave
 Color: 13+White
 Gobo: 14
 Prism plate: 8+8+8, 8+16 prisms
 DMX Channels: 16/20CH
 Color Temperature: 7626K±500K
 Pan: 540°; Tilt: 270°
 Dimmer: 0-100% Linear dimmer
 Carton Size: 567x340x405mm (1Pcs)
 N.W./G.W.: 13/15Kg

技术参数：



电压：AC100V-240V 50-60HZ
 额定功率：340W (LB250R) / 350W (LB260R)
 330W (LB250) / 340W (LB260)
 光源：250W+灯带:5.8W(5050 RGB LED) (LB250R)
 260W+灯带:5.8W(5050 RGB LED) (LB260R)
 250W (LB250) / 260W (LB260)
 光束角度：1.9°
 控制模式：DMX512 / 自走 / 声控 / 主从联机
 颜色：13+白光
 图案：14
 棱镜：8+8+8, 8+16棱镜
 通道：16/20通道
 色温：7626K±500K
 水平：540°；垂直：270°
 调光：0~100% 机械线性调光
 外箱规格：567x340x405mm (1台)
 净重/毛重：13/15千克

illumination

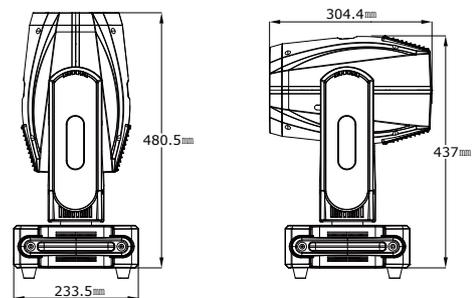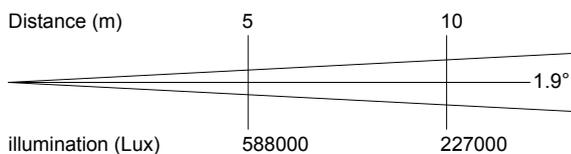

LB480

480W Beam

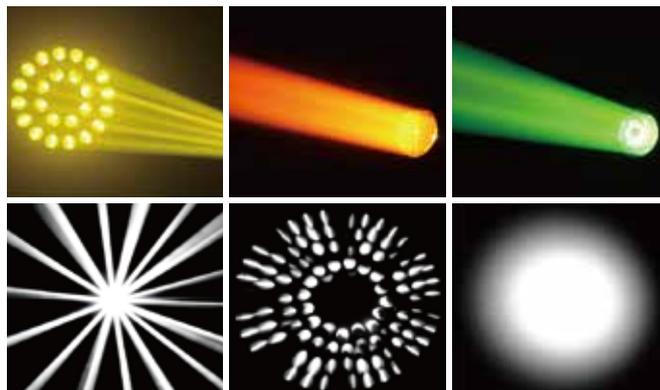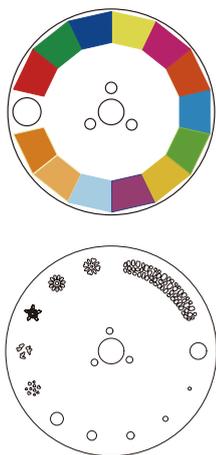



Technical Specifications:



Voltage: AC100V-240V 50-60HZ
 Rated Power: 700W
 Light Source: 450W Panasonic bulb
 Color Temperature: 7800K±500K
 Beam Angle: 2.1°
 Pan: 540°16bit, Three-phase stepper motor
 Tilt: 270°16bit, Three-phase stepper motor
 Dimmer: 0-100% Linear dimmer
 Color Wheel: 14 color + blank color(with half color effect), two-way rotation with speed control
 Gobo Wheel: 12 fixed gobo + blank gobo, gobo shake, two-way rotation with speed control
 Double prism: 8+8+8 honeycomb prism, 8+8 prism (Superposable,two-way independent rotation)
 Multi-Colored wheel: One color wheel with 6-colors effect
 Focusing: Electromotion linear adjustment
 Control Mode: DMX512 / Auto / Sound / Master-slave / RDM
 DMX Channels: 16CH
 Display: 2.4 inch TFT color LCD, touch control and key control, smart temperature control
 Protection class: IP20
 Carton Size: 475x400x590mm (1Pcs)
 N.W./G.W.: 16.5/20Kg

技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 700W
 光源: 450W 松下灯泡
 色温: 7800K±500K
 光束角度: 2.1°
 水平扫描: 540° 16bit, 三相步进电机
 垂直扫描: 270° 16bit, 三相步进电机
 调光: 0~100% 机械线性调光
 颜色盘: 14个色片+白光(可半色效果), 正反快慢转效果
 图案盘: 12个+白光, 图案晃动, 正反快慢转效果
 棱镜: 8+8+8蜂窝棱镜, 8+8棱镜(可叠加,可双向独立旋转)
 雾化: 1个独立的雾化效果, 光斑柔和自然
 调焦: 电动线性调焦
 控制模式: DMX512 / 自走 / 声控 / 主从联机 / RDM
 通道: 16通道
 显示屏: 2.4寸 TFT彩色液晶屏,
 带触摸控制和按键控制, 智能温度控制
 防护等级: IP20
 外箱规格: 475x400x590mm (1台)
 净重/毛重: 16.5/20千克

illumination

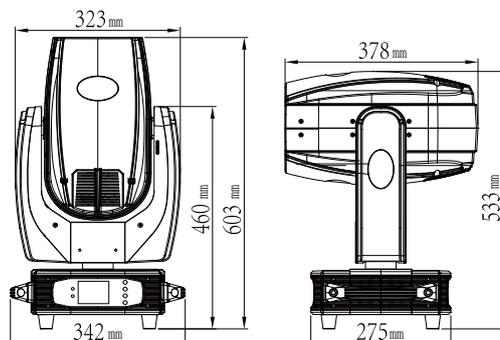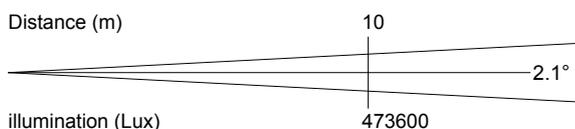


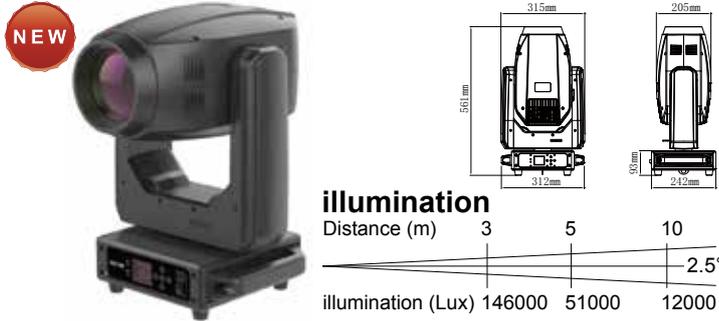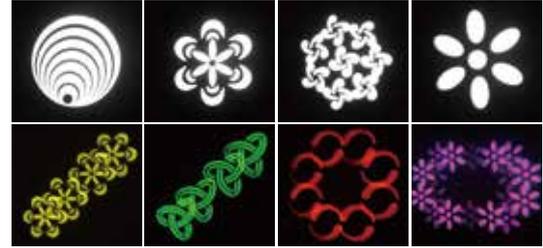BSW 300**300W Beam+Spot+Wash 3-in-1****CMY + CTO****Technical Specifications:**

Voltage: AC100V-240V 50-60HZ
 Rated Power: 450W
 Light Source: 300W
 Beam Angle: 2.5°~19°
 Control Mode: DMX512 / Auto / Sound / Master-slave
 Color: 12+White
 CMY: Color adjustment without limitation, smooth color transitions and precise color adjustment
 CTO: Adjustment of color temperature, Range: 3500K-7000K
 Fixed Gobo: 7+White+Cyclic effect
 Rotating Gobo: 7+White
 Prism plate: 4 Linear Prism+8 Prism
 DMX Channels: 27/29CH
 Color Temperature: 7000K±500K; Luminous flux: 2000 lm
 Pan: 540°; Tilt: 270°; Dimmer: 0-100% Linear dimmer
 Carton Size: 510x365x445mm (1Pcs)
 N.W./G.W.: 16.5/17.5Kg

技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 450W
 光源: 300W
 光束角度: 2.5°~19°
 控制模式: DMX512 / 自走 / 声控 / 主从联机
 颜色: 12+白色
 CMY: 无极变色, 色彩过渡平滑和精准调色
 CTO: 调整色温, 范围3500K-7000K
 固定图案: 7+白圆+循环效果
 旋转图案: 7+白圆
 棱镜: 4线性棱镜+8棱镜
 通道: 27/29通道
 色温: 7000K±500K; 光通量: 2000 lm
 水平: 540°; 垂直: 270°; 调光: 0~100% 线性调光
 外箱规格: 510x365x445mm (1台)
 净重/毛重: 16.55/17.5千克

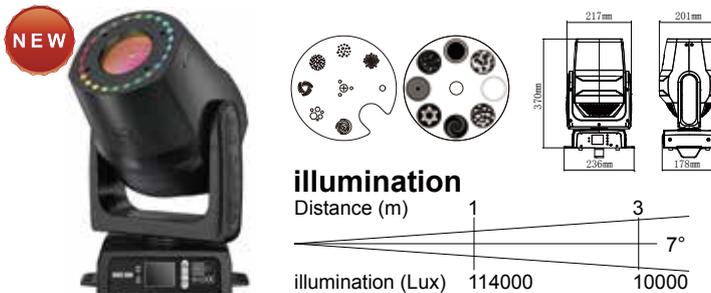BSW 200**150W Beam+Spot+Wash 3-in-1(+LED Strip)****Technical Specifications:**


Voltage: AC100V-240V 50-60HZ
 Rated Power: 240W
 Light Source: 1x150W White LED + 24x0.2W RGB LED
 Beam Angle: 7°~21°
 Control Mode: DMX512 / Auto / Sound / Master-slave
 Color: 7+White
 Fixed Gobo: 7+White; Rotating Gobo: 7+White
 Prism plate: 3 Prism; DMX Channels: 20CH
 Color Temperature: 13000K±500K
 Pan: 540°; Tilt: 270°
 Dimmer: 0-100% Linear dimmer
 Carton Size: 570x410x360mm (2Pcs)
 N.W./G.W.: 14/16Kg

技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 240W
 光源: 1x150W 白光 LED + 24x0.2W RGB LED
 光束角度: 7°~21°
 控制模式: DMX512 / 自走 / 声控 / 主从联机
 颜色: 7+白光
 固定图案: 7+白圆; 旋转图案: 7+白圆
 棱镜: 3棱镜; 通道: 20通道
 色温: 13000K±500K
 水平: 540°; 垂直: 270°
 调光: 0~100% 线性调光
 外箱规格: 570x410x360mm (2台)
 净重/毛重: 14/16千克

LB380-BSW

380W Beam+Spot+Wash 3-in-1

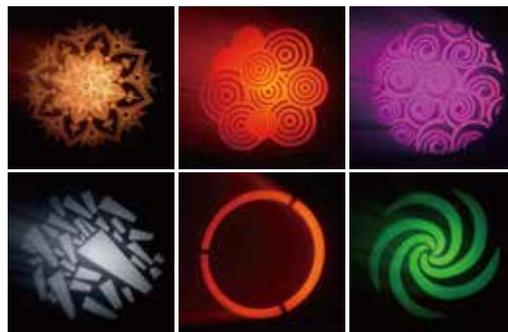**NEW**



Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 600W
 Light Source: 371W
 Beam Angle: 2.1°
 Control Mode: DMX512 / Auto / Sound / Master-slave
 Color: 14+White
 Fixed Gobo: 12+1 glass Gobo+White
 Glass Gobo: 7+White
 Prism plate: 6 Linear Prism+8 Prism
 DMX Channels: 16/24CH
 Color Temperature: 7200K±500K
 Luminous flux: 13000 lm
 Pan: 540°; Tilt: 270°
 Dimmer: 0-100% Linear dimmer
 Carton Size: 560x370x470mm (1Pcs)
 N.W./G.W.: 15/16.5Kg

技术参数:


电压: AC100V-240V 50-60HZ
 额定功率: 600W
 光源: 371W
 光束角度: 2.1°
 控制模式: DMX512 / 自走 / 声控 / 主从联机
 颜色: 14+白光
 固定图案: 12+1个玻璃图案+白光
 玻璃图案: 7+白光
 棱镜: 6线性棱镜+8棱镜
 通道: 16/24通道
 色温: 7200K±500K
 光通量: 13000 lm
 水平: 540°; 垂直: 270°
 调光: 0~100% 机械线性调光
 外箱规格: 560x370x470mm (1台)
 净重/毛重: 15/16.5千克

illumination

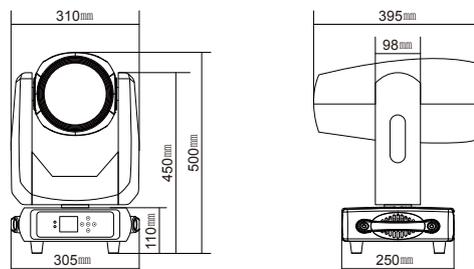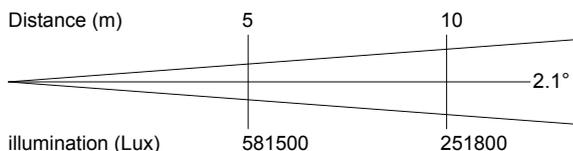

LM0740

7x40W (RGBW 4-in-1)Zoom+Beam+Wash Bee Eye



Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 350W
 Light Source: 7x40W RGBW 4-in-1 LEDs
 Color Temperature: 2800K-8500K
 Beam Angle: 4.5°-45°
 Control Mode: DMX512 / Auto / Sound / Master-slave
 Display: Colorful display
 DMX Channels: 12/18CH
 Pan: 540°; Tilt: 270°
 Carton Size: 420x330x500mm (2Pcs)
 N.W./G.W.: 12.5/15.7Kg

Feature: With CTO, wash, beam, effect mode (vortex, kaleidoscope), the front mirror disk can be variable direction infinitely rotating, lamp bead full brightness control


技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 350W
 光源: 7x40W 红绿蓝白 4合1
 色温: 2800K-8500K
 光束角度: 4.5°-45°
 控制模式: DMX512 / 自走 / 声控 / 主从联机
 显示屏: 彩色显示屏
 通道: 12/18通道
 水平: 540°; 垂直: 270°
 外箱规格: 420x330x500mm (2台)
 净重/毛重: 12.5/15.7千克

特点: 具有CTO, 染色, 光束, 效果模式(漩涡, 万花筒), 前置镜盘可变向无极旋转, 灯珠全亮控制

LM0740D

7x40W (RGBW 4-in-1)Zoom+Beam+Wash Bee Eye+Point control



Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 350W
 Light Source: 7x40W RGBW 4-in-1 LEDs
 Color Temperature: 2800K-8500K
 Beam Angle: 4.5°-45°
 Control Mode: DMX512 / Auto / Sound / Master-slave
 Display: Colorful display
 DMX Channels: 23/35/51CH
 Pan: 540°; Tilt: 270°
 Carton Size: 420x330x500mm (2Pcs)
 N.W./G.W.: 12.5/15.7Kg

Feature: CTO, Wash, Beam, Zoom, RGBW Full Colors Control, Point control, Effect Mode(windmill, kaleidoscope), Lens Plate Variable Direction Infinite Rotation

技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 350W
 光源: 7x40W 红绿蓝白 4合1
 色温: 2800K-8500K
 光束角度: 4.5°-45°
 控制模式: DMX512 / 自走 / 声控 / 主从联机
 显示屏: 彩色显示屏
 通道: 23/35/51通道
 水平: 540°; 垂直: 270°
 外箱规格: 420x330x500mm (2台)
 净重/毛重: 12.5/15.7千克


特点: 具有CTO, 染色, 光束, 效果模式(漩涡, 万花筒), 前置镜盘可变向无极旋转, 灯珠全亮/点控

LM0740L

7x40W (RGBW 4-in-1) Zoom+Beam+Wash Bee Eye+LED Strip



NEW

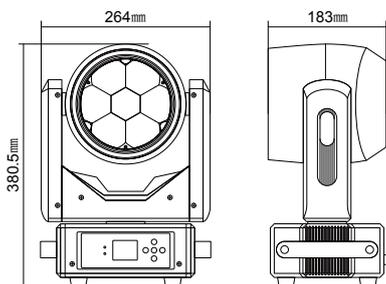

Technical Specifications:

Light Source: 7x40W (RGBW 4-in-1) + 31x0.2W (RGB 3-in-1)
 Rated Power: 280W
 Control Mode: Auto/Sound/DMX/Master-slave
 Channel: 25CH
 Power Supply: AC90-240V 50/60Hz
 Pan: 540°; Tilt: 270°
 Carton Size: 450x330x510mm (2Pcs)
 N.W./G.W.: 13/15Kg

技术参数:



光源: 7x40W (红绿蓝白 4合1) + 31x0.2W (红绿蓝 3合1)
 额定功率: 280W
 控制模式: 自走 / 声控 / DMX / 主从联机
 通道: 25
 电源: AC90-240V 50/60Hz
 水平: 540°; 垂直: 270°
 外箱规格: 450x330x510mm (2台)
 净重/毛重: 13/15千克

LM108

36x3W RGBW Moving Wash



illumination

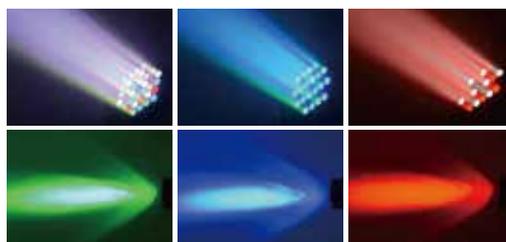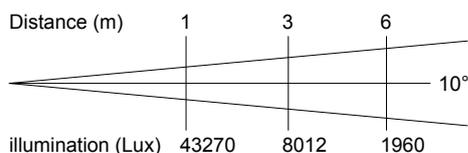


Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 130W
 Light Source: 36x3W (R8/G10/B10/W8)
 Control Mode: DMX512 / Auto / Sound / Master-slave
 DMX Channels: 9/16CH
 Pan: 540°; Tilt: 270°
 Carton Size: 345x345x475mm (2Pcs)
 N.W./G.W.: 9.5/11.2Kg



技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 130W
 光源: 36x3W (R8/G10/B10/W8)
 控制模式: DMX512 / 自走 / 声控 / 主从联机
 通道: 9/16通道
 水平: 540°; 垂直: 270°
 外箱规格: 345x345x475mm (2台)
 净重/毛重: 9.5/11.2千克



LM120S / LM120

120W (RGBW 4-in-1) COB Moving Head Light

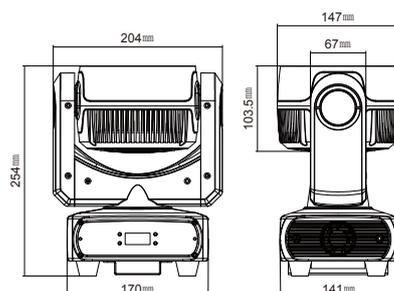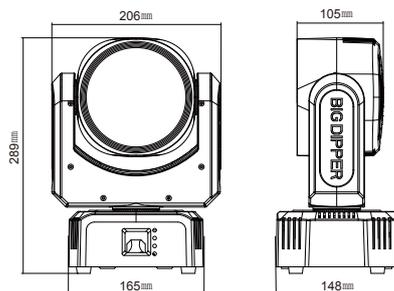**NEW**

Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 180W
 LED Source: 1x120W (RGBW 4-in-1) COB
 Strobe: 1-25 times/second or random
 Control Mode: DMX512 / Sound / Auto
 DMX Channels: 23CH
 Pan: 540° / Tilt: 270°

LM120S:

Carton Size: 530x340x440mm (4Pcs)
 N.W./G.W.: 10/11.6Kg

LM120:

Carton Size: 490x315x395mm (4Pcs)
 N.W./G.W.: 13.9/15.7Kg

技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 180W
 光源: 1x120W (红绿蓝白 4合1) COB
 频闪: 1-25次/秒或随机
 控制模式: DMX512 / 声控 / 自走
 通道: 23通道
 水平: 540° / 垂直: 270°


LM120S:

外箱规格: 530x340x440mm (4台)
 净重/毛重: 10/11.6千克

LM120:


外箱规格: 490x315x395mm (4台)
 净重/毛重: 13.9/15.7千克

illumination

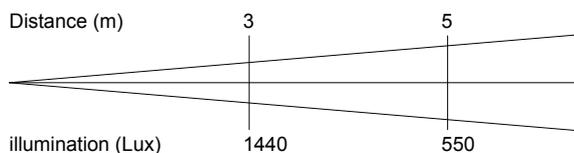

LM1940

19x40W High Power (RGBW 4-in-1) LEDs

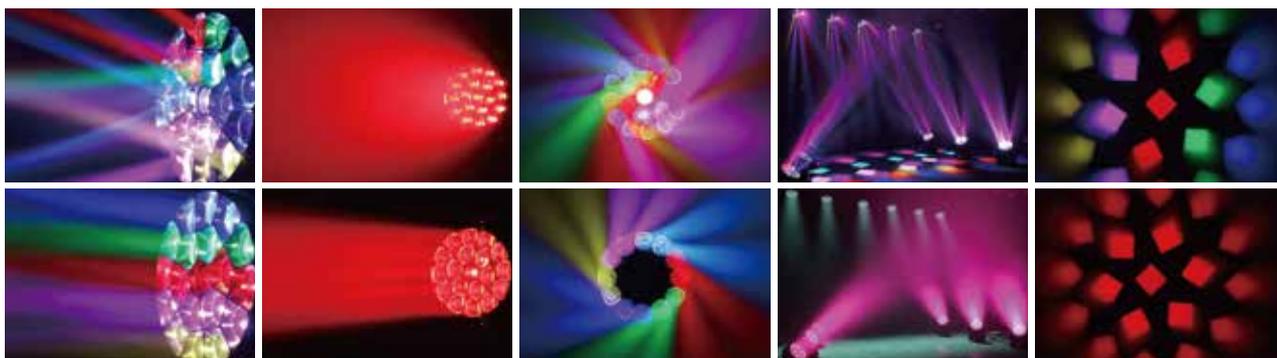



Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 760W
 LED Source: 19x40W high power RGBW 4-in-1 LEDs
 Zoom: 4°-60°
 Strobe: 0-20Hz
 Control Mode: Auto / DMX512 / Sound / Master-slave
 DMX Channels: 21/23/35/78/92/97/99CH
 Linear Dimmer: 0-100%
 Pan: 540°+16 bit fine; Tilt: 270°+16 bit fine
 Display: LCD colorful display
 IP Grade: IP20
 Carton Size: 455x370x460mm (1Pcs)
 N.W./G.W.: 17.2/18.6Kg

技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 760W
 光源: 19x40W高功率红绿蓝白 4合1灯珠
 调焦: 4°-60°
 频闪: 0-20Hz
 控制模式: 自走 / DMX512 / 声控 / 主从联机
 通道: 21/23/35/78/92/97/99通道
 调光: 0-100%线性调光器
 水平: 540 +16位微调; 垂直: 270 +16位微调
 显示屏: 彩色显示屏
 防护等级: IP20
 外箱规格: 455x370x460mm (1台)
 净重/毛重: 17.2/18.6千克

Illumination

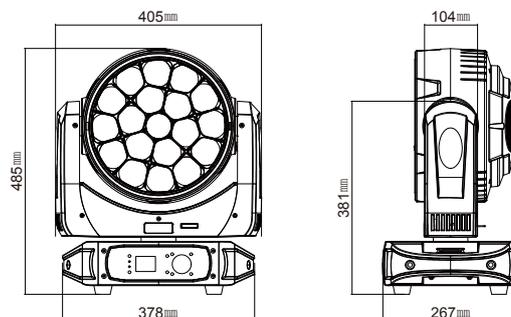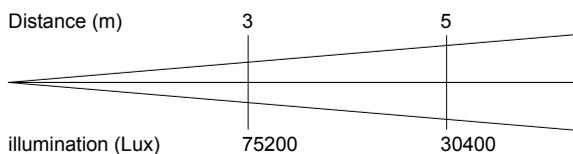

LM1915R

19x15W (RGBW 4-in-1) LEDs+LED Strip





Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 250W
 LED Source: 19x15W(RGBW 4-in-1)LEDs +66x0.2W(RGB 3-in-1)LED Strip
 Zoom: 8°-60°
 Strobe: 1-30Hz
 Control Mode: DMX512 / Auto / Sound / Master-slave / RDM
 DMX Channels: 15/24/32CH
 Linear Dimmer: 32bit 0-100%
 Pan: 540°; Tilt: 270°
 Operating temperature: -30°C-50°C
 Features: Moving head + Wash + Focusing
 Connection: DMX512 input and output / power input and output
 IP Grade: IP20
 Carton Size: 485x380x545mm (2Pcs)
 N.W./G.W.: 12.8/15Kg

技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 250W
 光源: 19x15W(红绿蓝白4合1)灯珠 +66x0.2W(红绿蓝3合1)灯带
 调焦: 8°-60°
 频闪: 1-30Hz
 控制模式: DMX512 / 自走 / 声控 / 主从联机 / RDM
 通道: 15/24/32CH
 调光: 32bit 0-100%线性调光
 水平: 540°; 垂直: 270°
 工作温度: -30°C-50°C
 特点: 摇头+染色+调焦
 连接方式: DMX512输入输出 / 电源输入输出
 防护等级: IP20
 外箱规格: 485x380x545mm (2台)
 净重/毛重: 12.8/15千克

illumination

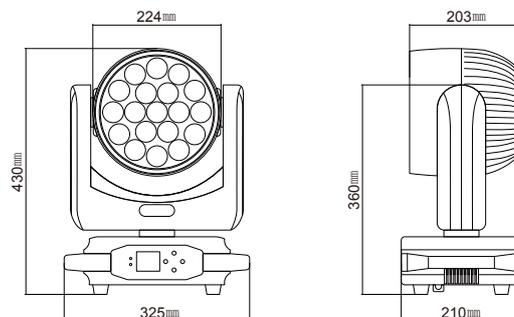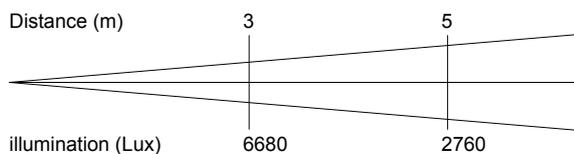

LM70S / LM70SR

7x8W (RGBW 4-in-1) Mini Moving Wash





Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 100W
 LED Source: 7x8W RGBW 4-in-1 LEDs
 Control Mode: DMX512 / Auto / Sound / Master-slave
 DMX Channels: 9/14CH
 Pan: 540°
 Tilt: 180°
 Carton Size: 405x405x300mm (4Pcs)
 N.W./G.W.: 7.6/8.6Kg

技术参数:


电压: AC100V-240V 50-60HZ
 额定功率: 100W
 光源: 7x8W 红绿蓝白 4合1灯珠
 控制模式: DMX512 / 自走 / 声控 / 主从联机
 通道: 9/14通道
 水平: 540°
 垂直: 180°
 外箱规格: 405x405x300mm (4台)
 净重/毛重: 7.6/8.6千克

illumination

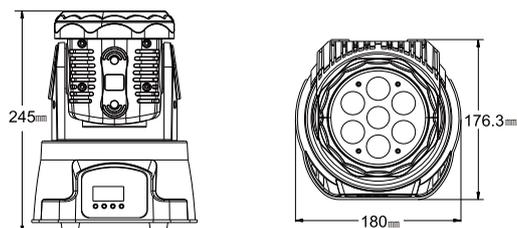
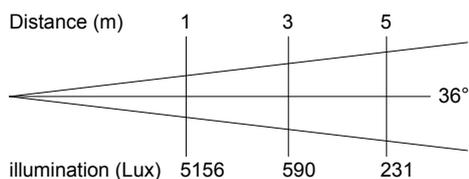


LM30A

8x3W RGBW Nini Moving Spider

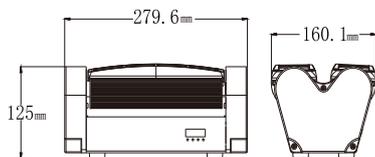

illumination

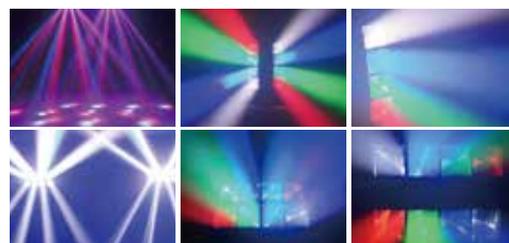

Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 45W
 Light Source: 8x3W (RGBW)
 Control Mode: DMX512 / Auto / Sound / Master-slave
 DMX Channels: 7/13CH
 Carton Size: 381x343x400mm (4Pcs)
 N.W./G.W.: 6.3/7.6Kg

技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 45W
 光源: 8x3W (红绿蓝白)
 控制模式: DMX512 / 自走 / 声控 / 主从联机
 通道: 7/13通道
 外箱规格: 381x343x400mm (4台)
 净重/毛重: 6.3/7.6千克

LS100

100W Spot



Technical Specifications:


Voltage: AC100V-240V 50-60HZ
 Rated Power: 127W
 Light Source: 100W White (Luminous Flux: 5000Lm)
 Color Temperature: 7000K
 Color: 7+White
 Fixed Gobo: 7+White; Rotating Gobo: 6 Glass Patterns+White
 Control Mode: DMX512 / Auto / Sound / Master-slave
 DMX Channels: 11/16CH
 Pan: 540°; Tilt: 270°
 Carton Size: 645x385x325mm (2Pcs)
 N.W./G.W.: 9.8/12.4Kg

技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 127W
 光源: 100W 白光 (光通量: 5000Lm)
 色温: 7000K
 颜色: 7+白光
 固定图案: 7+白光; 旋转图案: 6种玻璃图案+白光
 控制模式: DMX512 / 自走 / 声控 / 主从联机
 通道: 11/16通道
 水平: 540°; 垂直: 270°
 外箱规格: 645x385x325mm (2台)
 净重/毛重: 9.8/12.4千克

LS105

100W Spot (+LED Strip)

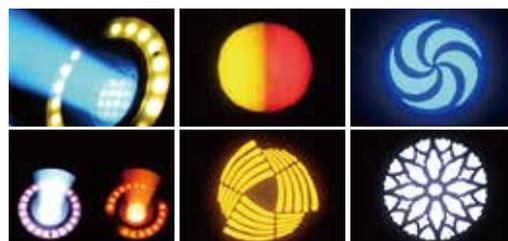



Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 140W
 Light Source: 100W White+21x0.2W 5050 RGB
 Color Temperature: 7000K
 Color: 7+White
 Fixed Gobo: 7+White
 Control Mode: DMX512 / Auto / Sound / Master-slave
 DMX Channels: 13/18CH
 Pan: 540°; Tilt: 270°
 Carton Size: 550x320x395mm (2Pcs)
 N.W./G.W.: 9.8/12.4Kg

技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 140W
 光源: 100W 白光+21x0.2W 5050 RGB
 色温: 7000K
 颜色: 7+白光
 固定图案: 7+白光
 控制模式: DMX512 / 自走 / 声控 / 主从联机
 通道: 13/18通道
 水平: 540°; 垂直: 270°
 外箱规格: 550x320x395mm (2台)
 净重/毛重: 9.8/12.4千克

illumination

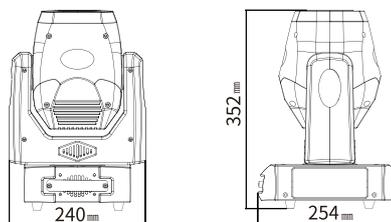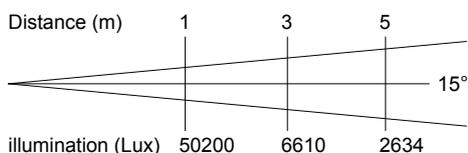

L1260

12x60W (RGBW 4-in-1) Moving Head Light



NEW



Technical Specifications:


Voltage: AC100V-240V 50-60HZ
 Rating power: 800W
 Light source: 12x60W (RGBW 4-in-1 LED)
 Control mode: DMX512 / Auto / Master-slave / Sound / RDM
 Channels: 20/53/101/155/169A/169B/179CH
 Dimming: 32-bit 0~100% linear dimming
 Features: Single swing+staining+beam
 Working temperature: -30 ° C~50 ° C
 Strobe frequency: 1-30HZ
 Appearance: Metal, Black
 Connection method: DMX512 input/output/power input/output.
 IP rating: IP20

技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 800W
 光源: 12x60W (红绿蓝白 4合1) 灯珠
 控制模式: DMX512 / 自走 / 主从 / 声控 / RDM
 通道: 20/53/101/155/169A/169B/179通道
 调光: 32bit 0~100%线性调光
 特点: 单颗摇摆+染色+光束
 工作温度: -30度~50度
 频闪频率: 1~30HZ
 外观: 金属、黑色
 连接方式: DMX512输入输出 / 电源输入输出。
 IP 等级: IP20

L1015

10x15W (RGBW 4-in-1) Moving Head Light

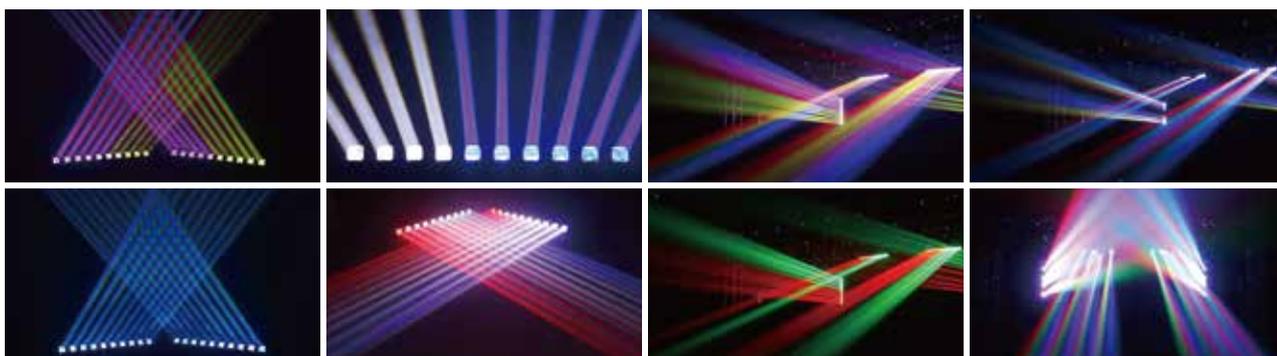

Technical Specifications:


Voltage: AC100V-240V 50-60HZ
 Rating power: 180W
 Light source: 10x15W (RGBW 4-in-1 LED)
 Control mode: DMX512 / Auto / Master-slave / Sound / RDM
 Channels: 7/13/43CH
 Dimming: 32bit 0-100% linear dimming
 Features: Y-axis moving head + beam + strobe
 Operating temperature: -30°C-50°C
 Strobe frequency: 1-30HZ
 Connection: DMX512 input and output / power input and output
 IP Rating: IP20
 Carton Size: 1090x290x240mm (2Pcs)
 N.W./G.W.: 12.7/14.5Kg

技术参数：

电压：AC100V-240V 50-60HZ
 额定功率：180W
 光源：10x15W (红绿蓝白 4合1) 灯珠
 控制模式：DMX512 / 自走 / 主从 / 声控 / RDM
 通道：7/13/43通道
 调光：32bit 0-100%线性调光
 特点：Y摇头+光束+爆闪
 工作温度：-30°C-50°C
 频闪频率：1-30HZ
 连接方式：DMX512输入输出 / 电源输入输出
 IP 等级：IP20
 外箱规格：1090x290x240mm (2台)
 净重/毛重：12.7/14.5千克

Illumination

Distance (m)	3	5
illumination (Lux)	R (7300) G (12520) B (402) W (17150)	R (5040) G (7300) B (90) W (7300)

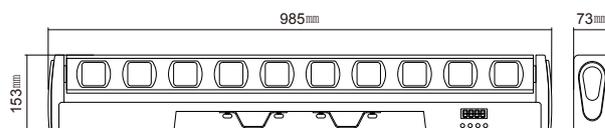


LCW001-H


4x50W Warm/Cold white Waterproof COB



CRI: ≥ 95



illumination

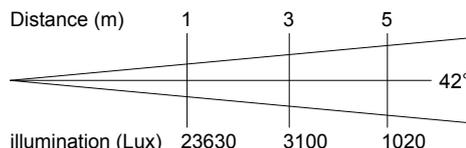

Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 200W
 Light Source: 4x50W Warm White+Cold White
 Color Temperature: Warm White: 3200K; Cold White: 6500K
 Control Mode: Dimmer / DMX / Master-slave
 DMX Channels: 2/4CH; Protection class: IP65
 Carton Size: 575x300x325mm (2Pcs)
 N.W./G.W.: 10.8/12.6Kg

技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 200W
 光源: 4x50W 暖白+冷白
 色温: 暖白: 3200K; 冷白: 6500K
 控制模式: 调光 / DMX / 主从联机
 通道: 2/4通道; 防护等级: IP65
 外箱规格: 575x300x325mm (2台)
 净重/毛重: 10.8/12.6千克

LPW005-H

18x8W (RGBW 4-in-1) Colorful Waterproof Par




Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 145W
 Light Source: 18x8W RGBW 4-in-1; Color Temperature: 6500K
 Control Mode: Dimmer/Jump/Gradual/Pulse Change/Strobe/Colors Macro/DMX/Master-slave
 DMX Channels: 4/8CH; Protection class: IP65
 Carton Size: 575x300x325mm (2Pcs)
 N.W./G.W.: 10.8/12.6Kg

技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 145W
 光源: 18x8W 红绿蓝白 4合1; 色温: 6500K
 控制模式: 调光/跳变/渐变/脉变/频闪/颜色宏/DMX512/主从联机/RDM
 通道: 4/8通道; 防护等级: IP65
 外箱规格: 575x300x325mm (2台)
 净重/毛重: 10.8/12.6千克

illumination

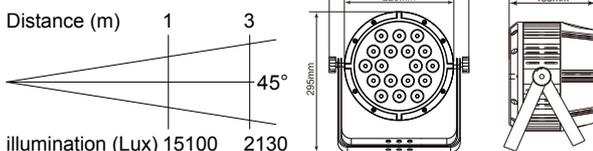

LPW004-H

7x6W (RGBW 4-in-1) Colorful Waterproof Par




Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 45W
 Light Source: 7x6W RGBW 4-in-1; Color Temperature: 9000K
 Control Mode: Dimmer/Jump/Gradual/Pulse Change/Strobe/Colors Macro/DMX/Master-slave
 DMX Channels: 4/8CH; Protection class: IP65
 Carton Size: 475x385x250mm (4Pcs)
 N.W./G.W.: 13.6/15.2Kg

技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 45W
 光源: 7x6W 红绿蓝白 4合1; 色温: 9000K
 控制模式: 调光/跳变/渐变/脉变/频闪/颜色宏/DMX512/主从联机/RDM
 通道: 4/8通道; 防护等级: IP65
 外箱规格: 475x385x250mm (4台)
 净重/毛重: 13.6/15.2千克

illumination

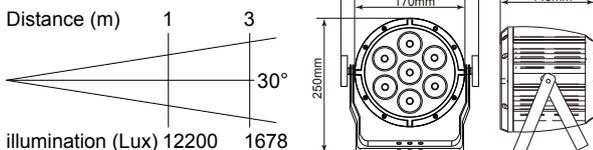

BW50-RGB

50W Outdoor Waterproof (With App control)



Technical Specifications :

Laser Light Source Power: 50W
 Total Power Consumption: 500W
 Power Configuration:
 Red: 14W - 635nm; Green: 15W - 532nm; Blue: 24W - 455nm
 Operating Temperature Range: -40°C to 50°C
 Scanning Speed: Large lens 50KPPS
 Lifespan: 20,000 hours
 Scanner Angle: 60° Standard scanning unit and drive circuit
 Cooling Method: Natural air cooling
 Software: FB4 software control, supports offline operation.
 Built-in large-capacity memory card can play pre-loaded shows.
 Control Modes: DMX512, UDP, PC software, ILDA (RJ45.ILDA interface)
 Operating Voltage: AC110V-240V, 50/60Hz
 Protection Level: IP67
 Machine Dimensions: 520*480*280mm

Key Features :

1. Laser Source: Uses original imported laser diodes with high stability and long lifespan.
2. Unique Laser Design: Completely blocks dust, moisture, and air from entering. The internal optical path and components operate in a dust-free, moisture-free, and oxidation-free environment for lower light loss and greater stability. The electronics are protected from condensation and always remain dry, resulting in smoother performance and reduced failure rates.
3. Built-in Temperature Control System: Automatically adjusts the internal temperature, ensuring stable operation in environments from -40°C to 50°C.
4. High-Speed Scanning Subsystem: Provides scanning functionality for laser beams, enabling the light to create spotlight effects, patterns, or text according to the designer's intent.

技术参数 :

激光光源功率: 50W
 整机功率: 500W
 功率配置: R-14W-635nm ; G-15W-532nm ; B-24W-455nm
 工作温度范围: -40-50°
 扫描速度: 大镜片50KPPS
 使用寿命: 20000个小时
 振镜角度: 60° 标准扫描单元及扫描驱动电路。
 冷却方式: 自然风冷
 软件: FB4软件控制 可脱机使用, 内置大容量内存卡, 可读取卡里节目播放。
 控制模式: DMX512, UDP, PC电脑软件ILDA接口: RJ45.ILDA
 工作电压: AC110v-240V50/60Hz
 防护等级: IP67
 机器尺寸: 520*480*280mm

性能特点 :

1. 激光光源: 采用原装进口激光管, 稳定性高, 使用寿命长。
2. 独一无二的激光设计: 完全阻绝了灰尘, 水汽, 空气的进入, 系统内部的光路系统、光学配件始终在无尘, 无水汽, 无氧化的环境下工作, 光损耗更低, 更稳定; 电路部分不再被凝露所威胁, 永远处于干燥的环境, 运行更平稳、故障率更低。
3. 内置温控系统, 自动调节温度, 可在-40°- 50°稳定工作。
4. 高速扫描子系统, 提供了对激光束的扫描功能, 使得激光器发出的光束, 能按照设计者的意图, 形成特写效果的光束或者图案和文字。

BW40-RGB

40W Outdoor Waterproof (With App control)



Technical Specifications :

Laser Light Source Power: 40W
 Total Power Consumption: 500W
 Power Configuration:
 Red: 12W - 635nm; Green: 12W - 532nm; Blue: 17W - 455nm
 Operating Temperature Range: -40°C to 50°C
 Scanning Speed: Large lens, 50KPPS
 Lifespan: 20,000 hours
 Scanner Angle: 60° Standard scanning unit and scanning drive circuit
 Cooling Method: Natural air cooling
 Software: Imported FB4 software control, supports offline operation.
 Built-in large-capacity memory card allows playback of preloaded shows.
 Control Modes: DMX512, UDP, PC software, ILDA interface (RJ45.ILDA)
 Operating Voltage: AC110V-240V, 50/60Hz
 Protection Level: IP67
 Machine Dimensions: 520*480*280mm

Key Features :

1. Laser Source: Uses original imported laser diodes with high stability and long lifespan.
2. Unique Laser Design: Completely blocks dust, moisture, and air from entering. The internal optical path and components operate in a dust-free, moisture-free, and oxidation-free environment for lower light loss and greater stability. The electronics are protected from condensation and always remain dry, resulting in smoother performance and reduced failure rates.
3. Built-in Temperature Control System: Automatically adjusts the internal temperature, ensuring stable operation in environments from -40°C to 50°C.
4. High-Speed Scanning Subsystem: Provides scanning functionality for laser beams, enabling the light to create spotlight effects, patterns, or text according to the designer's intent.

技术参数 :

激光光源功率: 40W
 整机功率: 500W
 功率配置: R-12W-635nm; G-12W-532nm; B-17W-455nm
 工作温度范围: -40-50°
 扫描速度: 大镜片50KPPS
 使用寿命: 20000个小时
 振镜角度: 60° 标准扫描单元及扫描驱动电路。
 冷却方式: 自然风冷
 软件: 进口FB4软件控制 可脱机使用, 内置大容量内存卡, 可读取卡里节目播放。
 控制模式: DMX512, UDP, PC电脑软件ILDA接口:RJ45.ILDA
 工作电压: AC110v-240V50/60Hz
 防护等级: IP67
 机器尺寸: 520*480*280mm

性能特点 :

1. 激光光源: 采用原装进口激光管, 稳定性高, 使用寿命长。
2. 独一无二的激光设计: 完全阻绝了灰尘, 水汽, 空气的进入, 系统内部的光路系统、光学配件始终在无尘, 无水汽, 无氧化的环境下工作, 光损耗更低, 更稳定; 电路部分不再被凝露所威胁, 永远处于干燥的环境, 运行更平稳、故障率更低。
3. 内置温控系统, 自动调节温度, 可在-40°- 50°稳定工作。
4. 高速扫描子系统, 提供了对激光束的扫描功能, 使得激光器发出的光束, 能按照设计者的意图, 形成特写效果的光束或者图案和文字。

BW30-RGB

30W Outdoor Waterproof Laser Light



Technical Specifications :

Laser Power: 30W using imported Nichia laser source
 Power Configuration: Red:10W (635nm);Green:10W (532nm);Blue:15W (455nm)
 Operating Temperature Range: -40°C to 50°C
 Power Consumption: 400W/hour; Scanning Speed: 40KPPS
 Scanning Angle: 60° standard scanning unit with drive circuit
 Divergence Angle: < 1.0mrad
 Control Modes: DMX512, UDP, ILDA (RJ45 and ILDA interfaces)
 Operating Voltage: AC 110V-240V, 50/60Hz
 Protection Rating: IP65
 Dimensions: 450x370x230mm
 N.W.: 22kg

Performance Features:

1. Laser Source: Uses original imported laser tubes for high stability and long lifespan.
2. Unique Laser Design: Completely sealed from dust, moisture, and air. The internal optical system and components operate in a clean, dry, oxidation-free environment, ensuring lower light loss and greater stability. The electronics are protected from condensation and always remain dry, resulting in smoother operation and lower failure rates.
3. Built-in Temperature Control System: Automatically adjusts temperature, enabling stable operation between -40°C and 50°C.
4. High-Speed Scanning Subsystem: Enables precision control of laser beams to create customized beam effects, patterns, and text as designed.

技术参数 :

激光光源功率: 30W 进口日亚光源
 功率配置: 红:10W(635nm);绿:10W(532nm);蓝:15W(455nm)
 工作温度范围: -40-50°
 消耗功率: 400W/小时; 扫描速度: 40KPPS
 振镜角度: 60° 标准扫描单元及扫描驱动电路
 发散角度: < 1.0mrad
 控制模式: DMX512, UDP, ILDA接口:RJ45.ILDA
 工作电压: AC110V-240V, 50/60Hz
 防护等级: IP65
 机器尺寸: 450x370x230毫米
 净重: 22千克

性能特点 :

1. 激光光源: 采用原装进口激光管, 稳定性高, 使用寿命长
2. 独一无二的激光设计: 完全隔绝了灰尘, 水汽, 空气的进入, 系统内部的光路系统. 光学配件始终在无粉尘, 无水汽, 无氧化的环境下工作, 光损耗更低, 更稳定; 电路部分不再被凝露所威胁, 永远处于干燥的环境, 运行更平稳、故障率更低;
3. 内置温控系统, 自动调节温度, 可在-40°- 50°稳定工作。
4. 高速扫描子系统, 提供了对激光束的扫描功能, 使得激光器发出的光束, 能按照设计者的意图, 形成特写效果的光束或者图案和文字。

BW10-RGB

10W Outdoor Waterproof Laser Light



Technical Specifications :

Voltage: AC110V-240V 50-60HZ
 Rated Power: 180W
 laser: R638nm 2500MW;
 G525nm 3500MW; B450nm 6500MW
 Mirror parameters: 20Kpps, ±30°
 control mode: Sound/Auto/DMX512/ILDA/Bluetooth
 /ILDA computer control/Bluetooth
 Operating temperature: -20°C to 40°C
 Channel mode: 22CH
 Degree of protection: IP65
 Carton Size: 500x430x275mm
 N.W./G.W.: 11.55/13.05Kg

技术参数 :

电压: AC110V-240V 50-60HZ
 额定功率: 180W
 激光器: R638nm 2500MW ;
 G525nm 3500MW ; B450nm 6500MW
 振镜参数: 20Kpps, ±30°
 控制模式: 声控/自走/DMX512/ILDA电脑控制/蓝牙
 工作温度: -20°C至40°C
 通道模式: 22CH
 防护等级: IP65
 包装尺寸: 500x430x275mm
 净重/毛重: 11.55/13.05千克



LC500

4x100W CW/Amber 4 eyes COB



NEW

CRI: ≥95

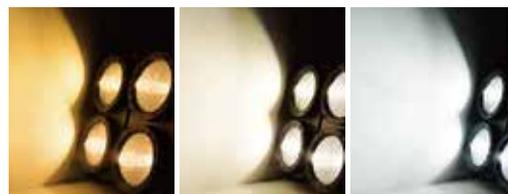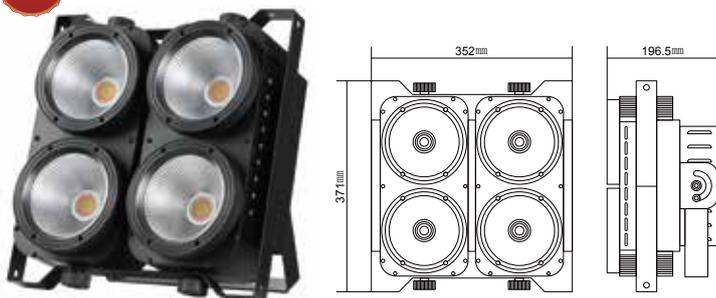

Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 500W
 Light Source: 4x100W COB (Cold white/Amber)
 Luminous flux: ≥13000 lm
 Control Mode: DMX512 / Auto / Sound / Master-slave
 DMX Channels: 12CH
 Carton Size: 430x410x530mm (2Pcs)
 N.W./G.W.: 16/17.5Kg

技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 500W
 光源: 4x100W COB (冷白/琥珀色)
 光通量: ≥13000 lm
 控制模式: DMX512 / 自走 / 声控 / 主从联机
 通道: 12通道
 外箱规格: 430x410x530mm (2台)
 净重/毛重: 16/17.5千克


LC200

2x100W CW/Amber 2 eyes COB + LED Strip



CRI: ≥95

NEW

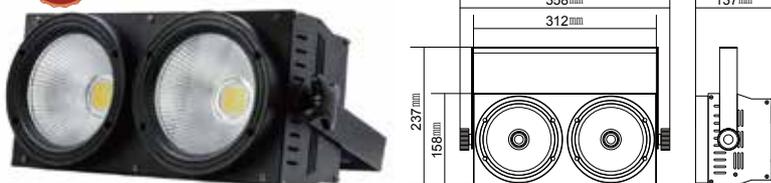

Technical Specifications:


Voltage: AC100V-240V 50-60HZ
 Rated Power: 200W
 Light Source: 2x100W (Cold white / Amber+36x0.5W 5050 LED)
 Control Mode: Auto/Sound/DMX512/Master-slave
 DMX Channels: 12CH
 Carton Size: 430x390x445mm (4Pcs)
 N.W./G.W.: 11/13Kg

技术参数:




电压: AC100V-240V 50-60HZ
 额定功率: 200W
 光源: 2x100W (冷白/琥珀色+36x0.5W 5050LED)
 控制模式: DMX512 / 自走 / 声控 / 主从联机
 通道: 12通道
 外箱规格: 430x390x445mm (4台)
 净重/毛重: 11/13千克

LC200W(-H/-HB)

200W (RGB 3-in-1) COB

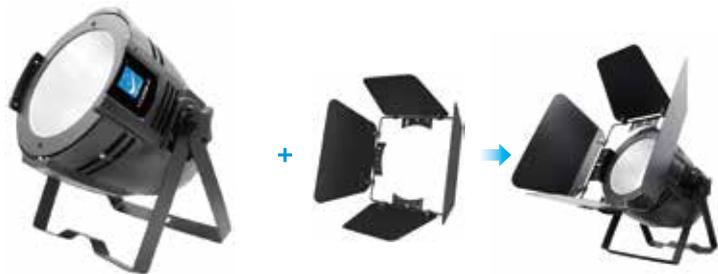

illumination

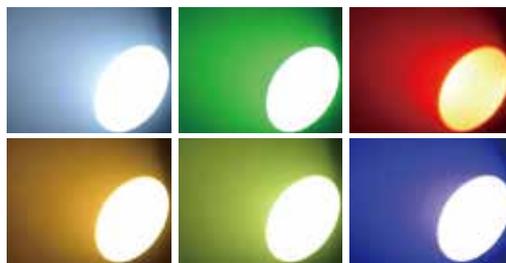

Technical Specifications :

Voltage: AC100V-240V 50-60HZ
Rated Power: 200W
Light Source: COB 200W (RGB 3-in-1)
Control Mode: DMX/Mast-Slave/Sound/Auto
DMX Channels: 7CH

技术参数 :

电压: AC100V-240V 50-60HZ
额定功率: 200W
光源: COB 200W (红绿蓝 3合1)
控制模式: DMX512 / 自走 / 声控 / 主从联机
通道: 7通道

型号/Model	LC200W	LC200W-H	LC200W-HB
包装尺寸/Carton Size	465x465x290mm	465x465x315mm	565x505x315mm
装箱数量/Packing	4	4	4
净重/毛重/N.W./G.W.	11.5/13.3Kg	12/13.8Kg	16.5/18.7Kg


LC001/LC002(-H/-HB)

100/200W CW/WW COB




CRI: ≥90

illumination (LC001/-H/-HB)



illumination (LC002/-H/-HB)



Technical Specifications :

Voltage: AC100V-240V 50-60HZ
Rated Power: 112W/210W
Light Source: 100W/200W COB (Cold/Warm White)
Color Temperature: Warm white: 3200K; Cold white: 5600K
Control Mode: DMX/Mast-Slave/Sound/Auto
DMX Channels: 2/4CH

型号/Model	LC001	LC001-H	LC001-HB	LC002	LC002-H	LC002-HB
包装尺寸/Carton Size	465x465x290mm	465x465x315mm	565x505x315mm	465x465x290mm	465x465x315mm	565x505x315mm
装箱数量/Packing	4	4	4	4	4	4
净重/毛重/N.W./G.W.	8.2/10.3Kg	8.7/10.8Kg	13.2/15.3Kg	11.4/13.5Kg	11.9/14Kg	16.4/18.5Kg

技术参数 :

电压: AC100V-240V 50-60HZ
额定功率: 112W/210W
光源: 100W/200W COB (冷/暖白)
色温: 暖白: 3200K; 冷白: 5600K
控制模式: DMX512 / 自走 / 声控 / 主从联机
通道: 2/4通道

LC003(-H/-HB)



54x2W Cold/Warm White



CRI: ≥90



illumination



型号/Model	LC003	LC003-H	LC003-HB
包装尺寸/ Carton Size	465x465x290mm	465x465x315mm	565x505x315mm
装箱数量/ Packing	4	4	4
净重/毛重/ N.W./G.W.	7.7/9.8Kg	8.2/10.3Kg	12.9/14.5Kg



Technical Specifications :

Voltage: AC100V-240V 50-60HZ
 Rated Power: 120W
 Light Source: 54x2W Cold/Warm White
 Color Temperature: Warm white: 3200K±300K;
 Cold white: 5600K±300K
 Control Mode: DMX512/Master-slave
 DMX Channels: 2/4CH

技术参数 :

电压: AC100V-240V 50-60HZ
 额定功率: 120W
 光源: 54x2W 冷/暖白
 色温: 暖白: 3200K±300K; 冷白: 5600K±300K
 控制模式: DMX512 / 主从联机
 通道: 2/4通道

LC004(-H/-HB)



4x50W CW/WW 4 eyes COB



CRI: ≥80



illumination



型号/Model	LC004	LC004-H	LC004-HB
包装尺寸/ Carton Size	465x465x290mm	465x465x315mm	565x505x315mm
装箱数量/ Packing	4	4	4
净重/毛重/ N.W./G.W.	9.7/11.8Kg	10.2/12.3Kg	14.7/16.8Kg



Technical Specifications :

Voltage: AC100V-240V 50-60HZ
 Rated Power: 200W
 Light Source: 4x50W COB (Cold/Warm White)
 Luminous flux: Color mixing≥8400Lm
 Dimmer: 0-100% Electronic Linear Dimmer
 Control Mode: DMX/Mast-Slave/Sound/Auto
 DMX Channels: 4/8CH

技术参数 :


电压: AC100V-240V 50-60HZ
 额定功率: 200W
 光源: 4x50W COB (冷/暖白)
 调光: 0-100% 电子线性调光
 光通量: 合光≥8400Lm
 控制模式: DMX512 / 自走 / 声控 / 主从联机
 通道: 4/8通道

LPC010(-H)



54x4W (RGBW 4-in-1)Par



CRI: ≥90



illumination

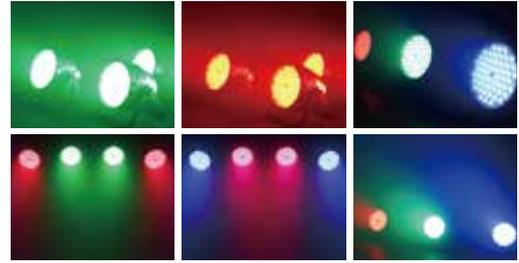

Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 160W
 Light Source: 54x4W(RGBW 4-in-1)
 Luminous flux: 4500 lm
 Control Mode: Auto/Sound/DMX/Master-slave
 DMX Channels: 4/8CH


技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 160W
 光源: 54x4W(红绿蓝白 4合1)
 光通量: 4500 lm
 控制模式: 自走 / 声控 / DMX / 主从联机
 通道: 4/8通道


型号/Model	LPC010	LPC010-H
包装尺寸/ Carton Size	465x465x290mm	465x465x315mm
装箱数量/Packing	4	4
净重/毛重/N.W./G.W.	8/10.5Kg	8.5/11Kg

LPC004-H

18x8W (RGBW 4-in-1)Par



illumination



Technical Specifications:


Voltage: AC100V-240V 50-60HZ
 Rated Power: 160W
 Light Source: 18x8W(RGBW 4-in-1)
 Luminous flux: 3000 lm
 Control Mode: Auto/Sound/DMX/Master-slave
 DMX Channels: 4/8CH
 Carton Size: 465x465x315mm (4Pcs)
 N.W./G.W.: 8.8/11.3Kg

技术参数:



电压: AC100V-240V 50-60HZ
 额定功率: 160W
 光源: 18x8W(红绿蓝白 4合1)
 光通量: 3000 lm
 控制模式: 自走 / 声控 / DMX / 主从联机
 通道: 4/8通道
 外箱规格: 465x465x315mm (4台)
 净重/毛重: 8.8/11.3千克

LPC007(-H)

54x3W (RGB 3-in-1)Par



illumination

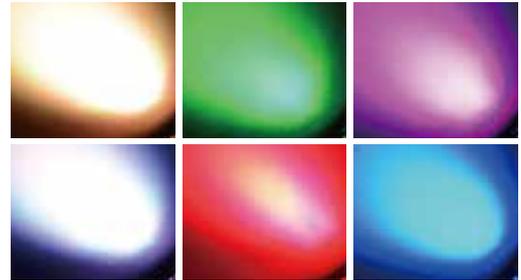

Technical Specifications :

Voltage: AC100V-240V 50-60HZ
 Rated Power: 180W
 Light Source: 54x3W(RGB 3-in-1)
 Control Mode: Auto/Sound/DMX/Master-slave
 DMX Channels: 3/7CH


技术参数 :

电压: AC100V-240V 50-60HZ
 额定功率: 180W
 光源: 54x3W(红绿蓝 3合1)
 控制模式: 自走 / 声控 / DMX / 主从联机
 通道: 3/7通道



型号/Model	LPC007	LPC007-H
包装尺寸/Carton Size	465x465x290mm	465x465x315mm
装箱数量/Packing	4	4
净重/毛重/N.W./G.W.	7.5/9.5Kg	8/10Kg

LPC007 Plus(-H Plus)

60x3W (RGB 3-in-1)Par



illumination

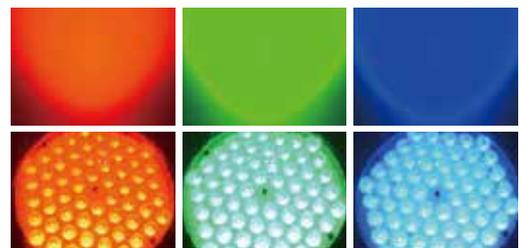

Technical Specifications :

Voltage: AC100V-240V 50-60HZ
 Rated Power: 190W
 Light Source: 60x3W(RGB 3-in-1)
 Luminous flux: 3292 lm
 Control Mode: Auto/Sound/DMX/Master-slave
 DMX Channels: 3/7CH


技术参数 :

电压: AC100V-240V 50-60HZ
 额定功率: 190W
 光源: 60x3W(红绿蓝 3合1)
 光通量: 3292 lm
 控制模式: 自走 / 声控 / DMX / 主从联机
 通道: 3/7通道

型号/Model	LPC007 Plus	LPC007-H Plus
包装尺寸/Carton Size	465x465x290mm	465x465x315mm
装箱数量/Packing	4	4
净重/毛重/N.W./G.W.	7.5/9.5Kg	8/10Kg

LP001 Plus(-H Plus)

60x3W (RGBW)Par

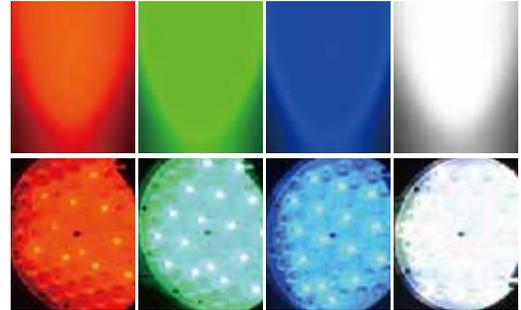

型号/Model	LP001 Plus	LP001-H Plus
包装尺寸/ Carton Size	465x465x290mm	465x465x315mm
装箱数量/ Packing	4	4
净重/毛重/ N.W./ G.W.	7.5/9.5Kg	8/10Kg

Technical Specifications:


Voltage: AC100V-240V 50-60HZ
 Rated Power: 190W
 Light Source: 60x3W(R12/G18/B18/W12)
 Luminous flux: 3800 lm
 Control Mode: Auto/Sound/DMX/Master-slave
 DMX Channels: 4/8CH

技术参数：

电压：AC100V-240V 50-60HZ
 额定功率：190W
 光源：60x3W(红12/绿18/蓝18/白12)
 光通量：3800 lm
 控制模式：自走 / 声控 / DMX / 主从联机
 通道：4/8通道

LP001(-H)

54x3W (RGBW)Par

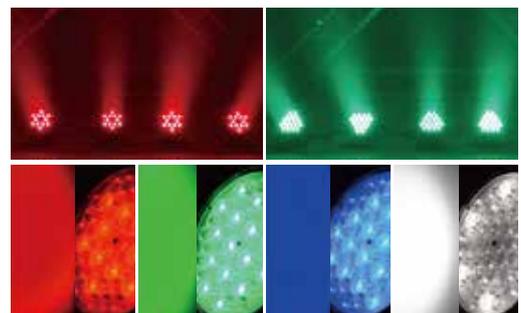

型号/Model	LP001	LP001-H
包装尺寸/ Carton Size	465x465x290mm	465x465x315mm
装箱数量/ Packing	4	4
净重/毛重/ N.W./ G.W.	7.5/9.5Kg	8/10Kg

Technical Specifications:


Voltage: AC100V-240V 50-60HZ
 Rated Power: 180W
 Light Source: 54x3W(R12/G18/B18/W6)
 Luminous flux: 3300 lm
 Control Mode: Auto/Sound/DMX/Master-slave
 DMX Channels: 4/8CH

技术参数：

电压：AC100V-240V 50-60HZ
 额定功率：180W
 光源：54x3W(红12/绿18/蓝18/白6)
 光通量：3300 lm
 控制模式：自走 / 声控 / DMX / 主从联机
 通道：4/8通道

LP009 Plus

60x3W (RGBW+Amber)Par

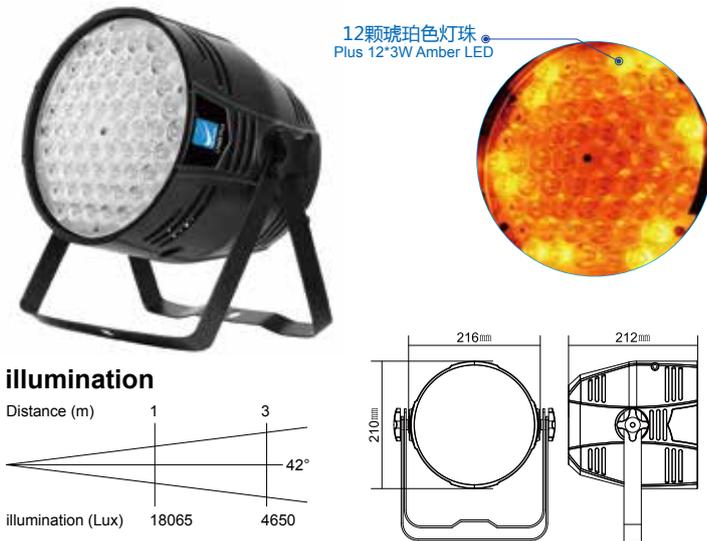

Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 200W
 Light Source: 60x3W(R12/G12/B12/W12/A12)
 Control Mode: Auto/Sound/DMX/Master-slave
 DMX Channels: 9CH
 Carton Size: 465x465x290mm (4Pcs)
 N.W./G.W.: 7.6/9.5Kg

技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 200W
 光源: 60x3W(红12/绿12/蓝12/白12/琥珀色12)
 控制模式: 自走 / 声控 / DMX / 主从联机
 通道: 9通道
 外箱规格: 465x465x290mm (4台)
 净重/毛重: 7.6/9.5千克

LP009

54x3W (RGBW+Amber)Par



Technical Specifications:


Voltage: AC100V-240V 50-60HZ
 Rated Power: 180W
 Light Source: 54x3W(R12/G12/B12/W12/A6)
 Control Mode: Auto/Sound/DMX/Master-slave
 DMX Channels: 9CH
 Carton Size: 465x465x315mm (8Pcs)
 N.W./G.W.: 14/17.5Kg

技术参数:



电压: AC100V-240V 50-60HZ
 额定功率: 180W
 光源: 54x3W(红12/绿12/蓝12/白12/琥珀色6)
 控制模式: 自走 / 声控 / DMX / 主从联机
 通道: 9通道
 外箱规格: 465x465x315mm (8台)
 净重/毛重: 14/17.5千克

LPC004

18x8W (RGBW 4-in-1)Par



illumination

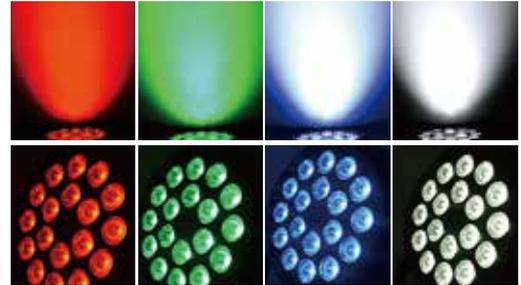

Technical Specifications:


Voltage: AC100V-240V 50-60HZ
 Rated Power: 180W
 Light Source: 18x8W(RGBW 4-in-1)
 Control Mode: Auto/Sound/DMX/Master-slave
 DMX Channels: 9CH
 Carton Size: 505x265x410mm (4Pcs)
 N.W./G.W.: 9.4/11.5Kg

技术参数:


电压: AC100V-240V 50-60HZ
 额定功率: 180W
 光源: 18x8W(红绿蓝白 4合1)
 控制模式: 自走 / 声控 / DMX / 主从联机
 通道: 9通道
 外箱规格: 505x265x410mm (4台)
 净重/毛重: 9.4/11.5千克

LPC006

18x10W (RGBW+Amber+UV 6-in-1)Par



illumination



Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 200W
 Light Source: 18x10W(RGBW+Amber+UV 6-in-1)
 Control Mode: Auto/Sound/DMX/Master-slave
 DMX Channels: 10CH
 Carton Size: 505x265x410mm (4Pcs)
 N.W./G.W.: 9.4/11.5Kg

技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 200W
 光源: 18x10W(红绿蓝白+琥珀色+紫色 6合1)
 控制模式: 自走 / 声控 / DMX / 主从联机
 通道: 10通道
 外箱规格: 505x265x410mm (4台)
 净重/毛重: 9.4/11.5千克

LPC017

54x3W (RGB 3-in-1)Par



Technical Specifications :

Light Source: 54x3W (RGB 3-in-1)
 Rated Power: 80W
 Control Mode: Auto/Sound/DMX/Master-slave/Remote control
 Channel: 3/7CH
 Power Supply: AC100-240V 50/60Hz
 Lifespan: 50000Hours
 Carton Size: 690x460x470mm (12Pcs)
 N.W./G.W.: 12/15.2Kg

技术参数 :

光源: 54x3W (红绿蓝 3合1)
 额定功率: 80W
 控制模式: 自走/声控/DMX/主从联机/遥控
 通道: 3 / 7
 电源: AC100-240V 50/60Hz
 光源寿命: 50000小时
 外箱规格: 690x460x470mm (12台)
 净重/毛重: 12/15.2千克

LPC017-H

54x3W (RGB 3-in-1)Par




Technical Specifications :



Light Source: 54x3W (RGB 3-in-1)
 Rated Power: 80W
 Control Mode: Auto/Sound/DMX/Master-slave
 Channel: 3/7CH
 Power Supply: AC200-240V 50/60Hz
 Lifespan: 50000Hours
 Carton Size: 460x460x515mm (8Pcs)
 N.W./G.W.: 8.8/10.5Kg

技术参数 :

光源: 54x3W (红绿蓝 3合1)
 额定功率: 80W
 控制模式: 自走 / 声控 / DMX / 主从联机
 通道: 3 / 7
 电源: AC200-240V 50/60Hz
 光源寿命: 50000小时
 外箱规格: 460x460x515mm (8台)
 净重/毛重: 8.8/10.5千克

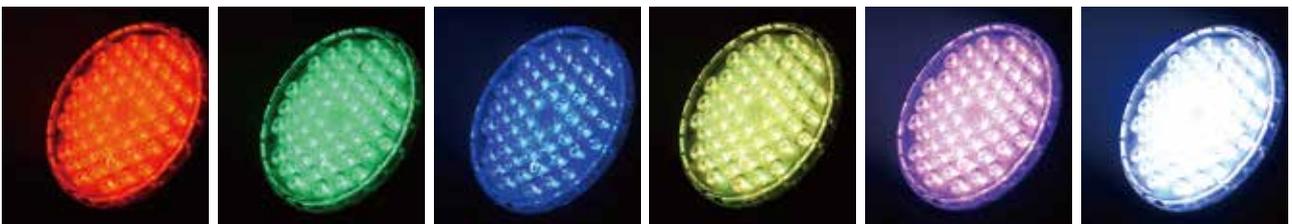

illumination

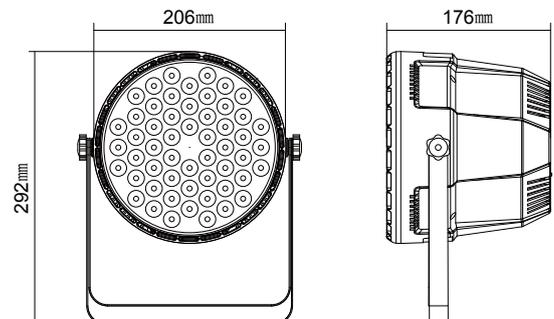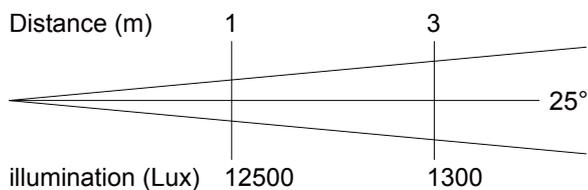

LPC018

54x1W (RGB 3-in-1)Par



Technical Specifications:

Light Source: 54x1W (RGB 3-in-1)
 Rated Power: 30W
 Control Mode: Auto/Sound/DMX/Master-slave/Remote control
 Channel: 3/7CH
 Power Supply: AC100-240V 50/60Hz
 Lifespan: 50000Hours
 Luminous Flux: 1300 lm
 Beam angle: 25°
 Carton Size: 475x390x520mm (24Pcs)
 N.W./G.W.: 14.5/17.5Kg

技术参数：


光源：54x1W (红绿蓝 3合1)
 额定功率：30W
 控制模式：自走 / 声控 / DMX / 主从联机 / 遥控
 通道：3/7
 电源：AC100-240V 50/60Hz
 光源寿命：50000小时
 光通量：1300 lm
 光束角度：25°
 外箱规格：475x390x520mm (24台)
 净重/毛重：14.5/17.5千克

LPC120

60x2W (RGBW 4-in-1)Par



illumination

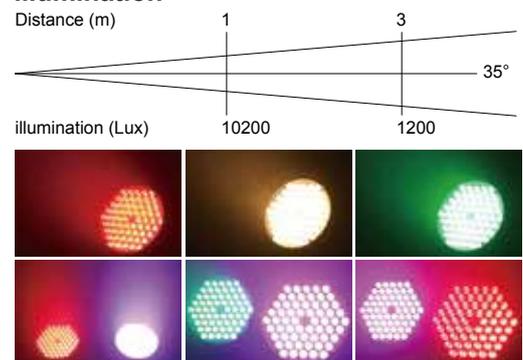

Technical Specifications:


Light Source: 60x2W (RGBW 4-in-1)
 Rated Power: 120W
 Mode: Auto / Sound / DMX / Master-slave
 Channel: 4/8CH
 Power Supply: AC100-240V 50/60Hz
 Luminous Flux: 3300 lm
 Lifespan: 50000Hours
 Carton Size: 530x460x300mm (12Pcs)
 N.W./G.W.: 12.6/14.2Kg

技术参数：



光源：60x2W (红绿蓝白 4合1)
 额定功率：120W
 模式：自走 / 声控 / DMX / 主从联机
 通道：4 / 8
 电源：AC100-240V 50/60Hz
 光通量：3300 lm
 光源寿命：50000小时
 外箱规格：530x460x300mm (12台)
 净重/毛重：12.6/14.2千克

LPC1218

12x18W (RGB+Lime+Amber+UV 6-in-1)Par



illumination

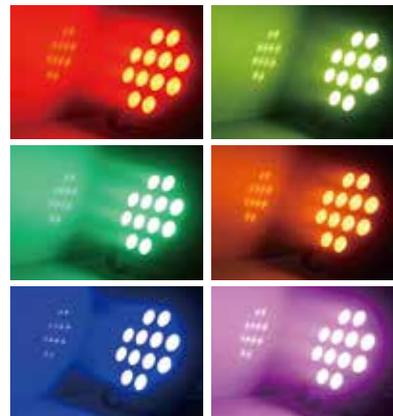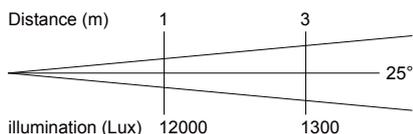

Technical Specifications:


Light Source: 12x18W (RGB+Lime+Amber+UV 6-in-1)
 Rated Power: 120W
 Control Mode: Auto/Sound/DMX/Master-slave
 Channel: 6/10CH
 Power Supply: AC100-240V 50/60Hz
 Lifespan: 50000Hours
 Carton Size: 465x465x240mm (8Pcs)
 N.W./G.W.: 16/18Kg

技术参数:


光源: 12x18W (红绿蓝+柠檬绿+琥珀色+紫色 6合1)
 额定功率: 120W
 控制模式: 自走 / 声控 / DMX / 主从联机
 通道: 6 / 10
 电源: AC100-240V 50/60Hz
 光源寿命: 50000小时
 外箱规格: 465x465x240mm (8台)
 净重/毛重: 16/18千克

LPC1818

18x18W (RGB+Lime+Amber+UV 6-in-1)Par



illumination

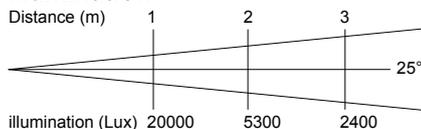

Technical Specifications:


Light Source: 18x18W (RGB++Lime+Amber+UV 6-in-1)
 Rated Power: 200W
 Control Mode: Auto/Sound/DMX/Master-slave
 Channel: 7/11CH
 Power Supply: AC100-240V 50/60Hz
 Luminous Flux: 3600 lm
 Lifespan: 50000Hours
 Carton Size: 485x250x430mm (4Pcs)
 N.W./G.W.: 10.4/12.8Kg

技术参数:



光源: 18x18W (红绿蓝+柠檬绿+琥珀色+紫色 6合1)
 额定功率: 200W
 控制模式: 自走 / 声控 / DMX / 主从联机
 通道: 7 / 11
 电源: AC100-240V 50/60Hz
 光通量: 3600 lm
 光源寿命: 50000小时
 外箱规格: 485x250x430mm (4台)
 净重/毛重: 10.4/12.8千克

LPC015(-H)

54x3W (RGB 3-in-1)Par



illumination

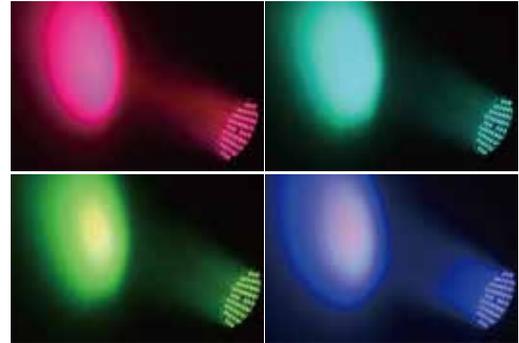

Technical Specifications:


Voltage: AC100V-240V 50-60HZ
 Rated Power: 150W
 Light Source: 54x3W(RGB 3-in-1)
 Control Mode: Auto/Sound/DMX/Master-slave
 DMX Channels: 3/7CH
 Carton Size: 465x465x315mm (8Pcs)
 N.W./G.W.: 12/14.5Kg

技术参数:


电压: AC100V-240V 50-60HZ
 额定功率: 150W
 光源: 54x3W(红绿蓝 3合1)
 控制模式: 自走 / 声控 / DMX / 主从联机
 通道: 3/7
 外箱规格: 465x465x315mm (8台)
 净重/毛重: 12/14.5千克

LPC180

60x3W (RGB 3-in-1)Par



illumination



Technical Specifications:


Voltage: AC100V-240V 50-60HZ
 Rated Power: 220W
 Light Source: 60x3W(RGB 3-in-1)
 Control Mode: Auto/Sound/DMX/Master-slave
 DMX Channels: 2/4/7CH
 Carton Size: 525x365x280mm (6Pcs)
 N.W./G.W.: 9.5/11.3Kg

技术参数:



电压: AC100V-240V 50-60HZ
 额定功率: 220W
 光源: 60x3W(红绿蓝 3合1)
 控制模式: 自走 / 声控 / DMX / 主从联机
 通道: 2/4/7通道
 外箱规格: 525x365x280mm (6台)
 净重/毛重: 9.5/11.3千克

LPC017N

54x3W (RGB 3-in-1)+Ring Effect Par

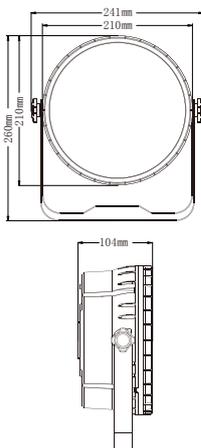

illumination

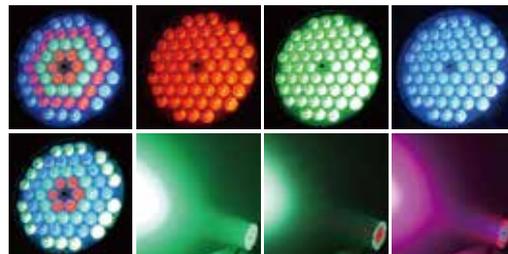

Technical Specifications:


Voltage: AC100V-240V 50-60HZ
 Rated Power: 175W
 Light Source: 54x3W(RGB 3-in-1)
 Control Mode: Auto/Sound/DMX/Master-slave
 Effect: Color jumping+mutation+strobe+shade+ring control
 DMX Channels: 4/7/16CH
 Carton Size: 465x465x315mm (8Pcs)
 N.W./G.W.: 9/11Kg

技术参数:


电压: AC100V-240V 50-60HZ
 额定功率: 175W
 光源: 54x3W(红绿蓝 3合1)
 控制模式: 自走 / 声控 / DMX / 主从联机
 效果: 跳变+突变+频闪+渐变+圈控
 通道: 4/7/16
 外箱规格: 465x465x315mm (8台)
 净重/毛重: 9/11千克

LPC60N

60x1.5W (RGB 3-in-1) Par

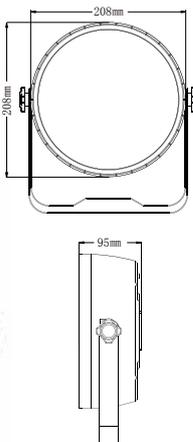

illumination



Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 100W
 Light Source: 60x1.5W(RGB 3-in-1)
 Luminous Flux: 2130 lm
 Control Mode: Flash/Color selection/Auto/Sound/DMX/Master-slave
 DMX Channels: 3/7CH
 Carton Size: 495x465x245mm (8Pcs)
 N.W./G.W.: 7.6/9Kg

技术参数:


电压: AC100V-240V 50-60HZ
 额定功率: 100W
 光源: 60x1.5W(红绿蓝 3合1)
 光通量: 2130 lm
 控制模式: 频闪/颜色选择/跳变/渐变/脉变/声控/控台/主从联机
 通道: 3/7通道
 外箱规格: 495x465x245mm (8台)
 净重/毛重: 7.6/9千克

LF350

350W Moving Head Strobe Light




NEW

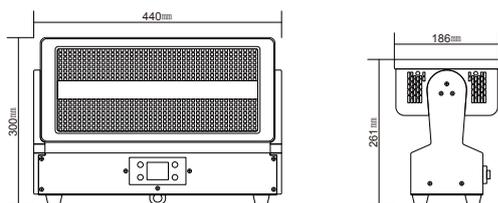

Technical Specifications:

Light Source: 672x0.2W (RGB 3-in-1) + 256x1W (White)
 Rated Power: 350W
 Control Mode: DMX512 / Auto / Master-slave / Sound
 Channel: 17/38/381CH
 Power Supply: AC100-240V 50-60Hz
 Dimming: 32bit 0-100% linear dimming
 Working Temperature: -20°C - 40°C
 Frequency: 1-30Hz
 Carton Size: 550x510x350mm (2Pcs)
 N.W./G.W.: 16/17.5Kg


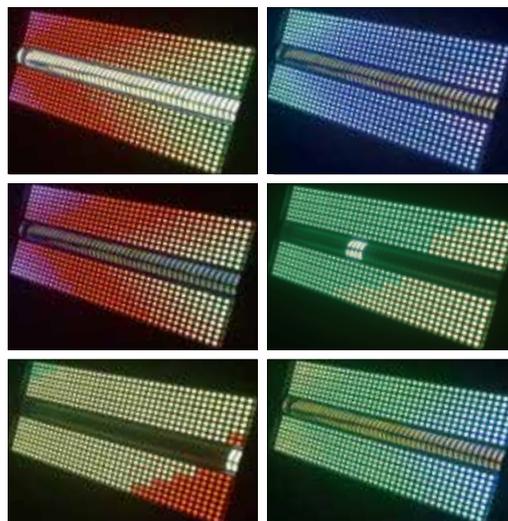


技术参数：

光源：672x0.2W (红绿蓝 3合1) + 256x1W (白)
 额定功率：350W
 控制模式：自走 / 声控 / DMX / 主从联机
 通道：17/38/381
 电源：AC100-240V 50/60Hz
 调光：线性调光
 工作温度：-20°C- 40°C
 频率：1-30Hz
 外箱规格：550x510x350mm (2台)
 净重/毛重：16/17.5千克

LF2405

250W Strobe Light

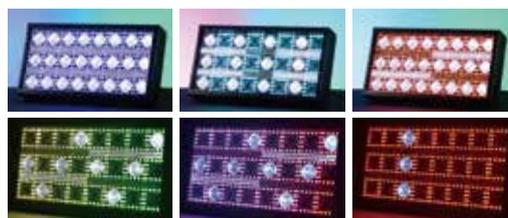

Technical Specifications:




Voltage: AC100V-240V 50-60HZ
 Light Source: 24x5W (White)
 + 256x0.2W (White)
 + 384x0.3W (RGB 3-in-1)
 Rated Power: 250W
 Control Mode: Auto/Sound/DMX512/Master-slave/RDM
 Dimming: 32bit 0-100% linear dimming
 Working Temperature: -30°C - 80°C
 Frequency: 1-30HZ
 DMX Channel: 5 / 11 / 112CH
 Carton Size: 490x390x305mm (2Pcs)
 N.W./G.W.: 9/10.5Kg

技术参数：

电压：AC100V-240V 50-60HZ
 光源：24x5W (白)
 + 256x0.2W (白)
 + 384x0.3W (红绿蓝 3合1)
 额定功率：250W
 控制模式：自动/声音/DMX512/主从/RDM
 调光：32位 0-100%线性调光
 工作温度：-30°C-80°C
 频率：1-30HZ
 DMX通道：5 / 11 / 112CH
 外箱规格：490x390x305mm (2台)
 净重/毛重：9/10.5千克

LF4808

250W Strobe Light



Technical Specifications:

Voltage: AC100V-240V 50-60Hz
 Light Source: 112x1W(White) + 768x0.2W(RGB 3-in-1)
 Rated Power: 250W
 Voltage: AC100-240V 50/60Hz
 Control Mode: Auto / DMX512 / Master-slave / RDM
 Dimming: 32bit 0-100% linear dimming
 Working Temperature: -30°C - 50°C
 Frequency: 1-30HZ
 DMX Channel: 4/15/152CH
 Carton Size: 510x490x345mm (4Pcs)
 N.W./G.W.: 14/16Kg

技术参数:


电压: AC100V-240V 50-60Hz
 光源: 112x1W (白) + 768x0.2W (红绿蓝 3合1)
 额定功率: 250W
 电压: AC100-240V 50/60Hz
 控制模式: 自动 / DMX512 / 主从联机 / RDM
 调光: 32位 0-100%线性调光
 工作温度: -30°C-50°C
 频率: 1-30HZ
 DMX通道: 4/15/152CH
 外箱规格: 510x490x345mm (4台)
 净重/毛重: 14/16千克

LF105

150W Strobe Light



NEW





Technical Specifications:

Light Source: 945x0.2W (RGB 3-in-1)
 Rated Power: 150W
 Control Mode: Auto/Sound/DMX/Master-slave
 Channel: 8/9/15CH
 Power Supply: AC100-240V 50/60Hz
 Dimming: 32bit 0-100% linear dimming
 Working Temperature: -20°C - 50°C
 Frequency: 1-30HZ
 Carton Size: 510x490x345mm (4Pcs)
 N.W./G.W.: 12.5/14.5Kg


技术参数:

光源: 945x0.2W (红绿蓝 3合1)
 额定功率: 150W
 控制模式: 自走 / 声控 / DMX / 主从联机
 通道: 8/9/15
 电源: AC100-240V 50/60Hz
 调光: 32位 0-100%线性调光
 工作温度: -20°C-50°C
 频率: 1-30HZ
 外箱规格: 510x490x345mm (4台)
 净重/毛重: 12.5/14.5千克

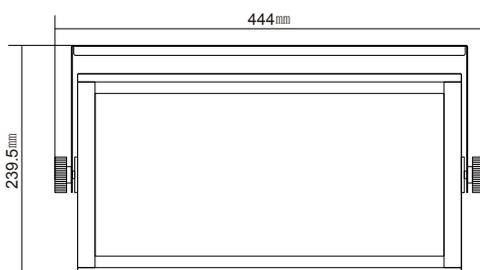

LF1421

14+21 Segment Double-row Light Curtain Lamp

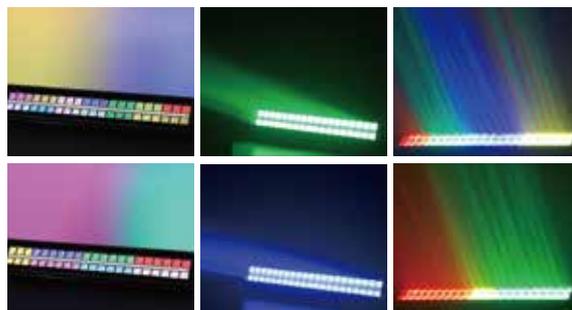


Technical Specifications:

Light Source: 42x3W (RGB 3-in-1) +63x1W (White)
 Rated Power: 90W
 Control Mode: Auto/Sound/DMX/Master-slave
 Channel: 4/16/63CH
 Power Supply: AC110-240V 50/60Hz
 Carton Size: 635x310x430mm (4Pcs)
 N.W./G.W.: 11/12.8Kg



技术参数：

光源：42x3W (红绿蓝 3合1) +63x1W (白)
 额定功率：90W
 控制模式：自走 / 声控 / DMX / 主从联机
 通道：4/16/63
 电源：AC110-240V 50/60Hz
 外箱规格：635x310x430mm (4台)
 净重/毛重：11/12.8千克

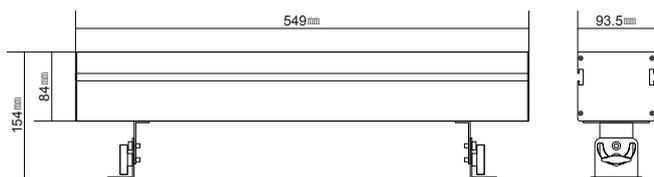

LF50RGB

50W Strobe Light

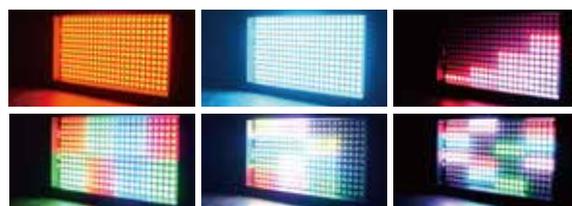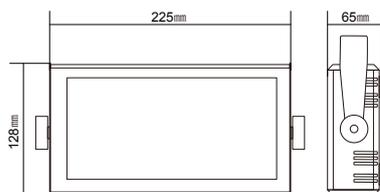

Technical parameters:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 50W
 Light Source: 288 Pcs(RGB 3-in-1)0.3W LED
 Control Mode: Auto/Sound/DMX/Master-slave/RDM
 DMX Channels: 8CH
 Color Temperature: 2500-8000K
 Carton Size: 550x375x370mm (20Pcs)
 N.W./G.W.: 14.7/17.8 Kgs

技术参数：

电压：AC100V-240V 50-60HZ
 额定功率：50W
 光源：288颗(红绿蓝 3合1)0.3W高亮度LED灯珠
 控制模式：自走 / 声控 / DMX / 主从联机/RDM
 通道：8通道
 色温：2500-8000K
 外箱规格：550x375x370mm (20台)
 净重/毛重：14.7/17.8千克

Effects:

0-100% linear dimmer system, 1-25 times/second high-speed strobe effect, adjustable speed, with random and pulse strobe

效果：

0-100%线性调光系统，1-25次/秒高速频闪效果，速度可调，带随机频闪及脉冲频闪

B20W-RGB

20W Full Color Animation Laser



Technical Specifications:



Total Laser Power: 20W
 Output Power: $\geq 20W$
 Green Laser Wavelength: 520nm $\geq 5000mW$
 Red Laser Wavelength: 638nm $\geq 6000mW$
 Blue Laser Wavelength: 450nm = 9000mW
 Built-in SD Card with Over 500 Programmed Effects
 Beam Parameters: CA 6.8nm / 2.8mrad
 Beam Size: 5.0mm
 Scanning System: 30Kpps galvanometer
 Scanning Angle: 40°; Laser Source: DPSS
 Operating Temperature Range: -10°C to 35°C
 Control Interface: ILDA software interface
 (optional Bluetooth APP interface available)
 Input Voltage: AC 100-250V, 50/60Hz
 Product Dimensions: 360x310x205 mm
 Weight: 16 kg

技术参数:

激光总功率: 20W
 输出功率: $\geq 20W$
 绿光波长: 520nm $\geq 5000mW$
 红光波长: 638nm $\geq 6000mW$
 蓝光波长: 450nm = 9000mW
 内置卡内置程序节目效果可达500多种
 光斑参数: CA 6.8nm/2.8mrad
 光斑大小: 5.0mm
 扫描振镜: 30Kpps
 扫描角度: 40°; 激光光源: DPSS
 工作温度范围: -10°C至35°C
 软件接口: ILDA软件接口 (可选蓝牙APP接口)
 输入电压: 交流100-250V, 50/60Hz
 产品尺寸: 360x310x205毫米
 重量: 16千克

B10W-RGB

10W Full Color Animation Laser

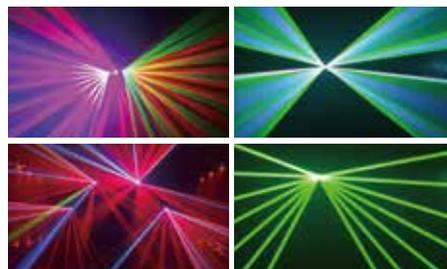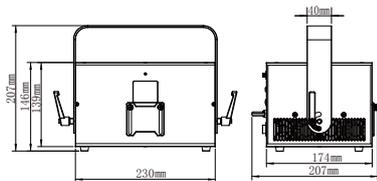

Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 120W
 Laser Diodes: R:638nm 2.5W, G:520nm 3W, B:450nm 4.5W
 Spot Divergence angle: $\leq 3mrad$
 Emitting Spot: 4x6.5mm
 Dimming: $< 0.15V$ lights off, 0.15~0.3V lights on,
 $\approx 4.8V$ lights on with full power;
 Control Mode: Sound /Auto/DMX512/PC ILDA/TF Card
 Working Temperature: -20°C~40°C
 DMX Channels: 15CH
 IP Rating: IP52 (Dustproof, Not Waterproof)
 Carton Size: 547x365x310mm (2Pcs)
 N.W./G.W.: 11.2/15Kg

技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 120W
 激光器: 红:638nm 2.5W, 绿:520nm 3W, 蓝:450nm 4.5W
 光斑发散角: $\leq 3mrad$
 出口光斑: 4x6.5mm
 激光调制: $< 0.15V$ 闭光, 0.15~0.3V 出光, $\approx 4.8V$ 全功率出光;
 控制模式: 声控/自走/DMX512/ILDA电脑连接控制/TF卡
 工作温度: -20°C至40°C
 通道: 15
 保护等级: IP52 (防尘)
 外箱规格: 547x365x310mm (2台)
 净重/毛重: 11.2/15千克

B5/3W-RGB

5/3W Full Color Animation Laser




Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Rated Power: 90W (B5W-RGB) / 75W (B3W-RGB)
Laser Diodes (B5W-RGB) :
 R:638nm 1.2W, G:520nm 1W, B:450nm 2.7W
Laser Diodes (B3W-RGB) :
 R:638nm 0.6W, G:520nm 0.9W, B:445nm 1.3W
 Spot Divergence angle: $\leq 2\text{mrad}$
 Emitting Spot: 5x6.5mm(B5W-RGB) / 4x6.5mm(B3W-RGB)
 Dimming: TTL
 Control Mode: Sound /Auto/DMX512/PC ILDA/TF Card
 Working Temperature: $-20^{\circ}\text{C}\sim 40^{\circ}\text{C}$
 DMX Channels: 15CH
 IP Rating: IP52 (Dustproof, Not Waterproof)
 Carton Size: 547x365x310mm (2Pcs)
 N.W./G.W.: 11.2/15Kg



技术参数:

电压: AC100V-240V 50-60HZ
 额定功率: 90W (B5W-RGB) / 75W (B3W-RGB)
激光器 (B5W-RGB) :
 红:638nm 1.2W, 绿:520nm 1W, 蓝:450nm 2.7W
激光器 (B3W-RGB) :
 红:638nm 0.6W, 绿:520nm 0.9W, 蓝:445nm 1.3W
 光斑发散角: $\leq 2\text{mrad}$
 出口光斑: 5x6.5mm(B5W-RGB) / 4x6.5mm(B3W-RGB)
 激光调制: TTL
 控制模式: 声控/自走/DMX512/ILDA电脑连接控制/TF卡
 工作温度: $-20^{\circ}\text{C}\sim 40^{\circ}\text{C}$
 通道: 15
 保护等级: IP52 (防尘)
 外箱规格: 547x365x310mm (2台)
 净重/毛重: 11.2/15千克

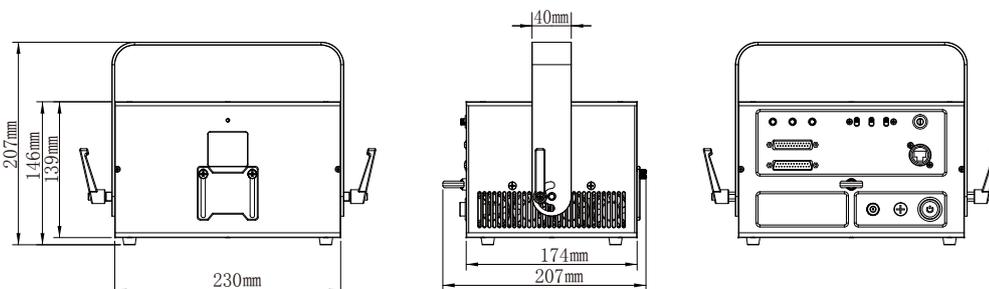

B1000

1W (Blue) Laser

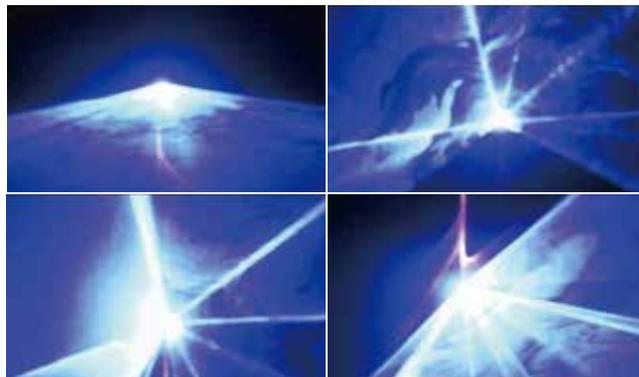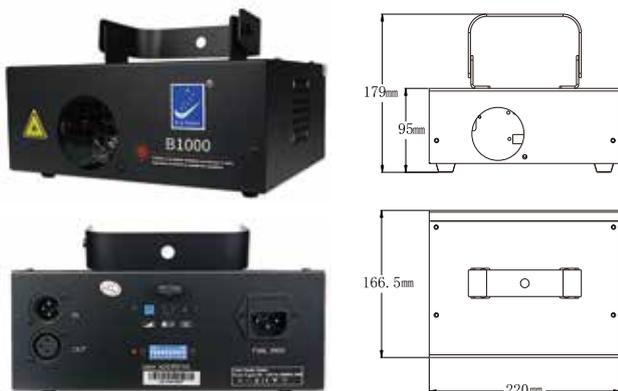

Technical Specifications:



Voltage: AC100V-240V 50-60HZ
 Laser Power: 1W
 Scanner Angle: $\pm 18^\circ$
 Control Mode: Auto/Sound/DMX
 DMX Channels: 12CH
 Carton Size: 560x467x366mm (8Pcs)
 N.W./G.W.: 11.3/13.7Kg

技术参数:

电压: AC100V-240V 50-60HZ
 激光功率: 1W
 扫描角度: $\pm 18^\circ$
 控制模式: 自走 / 声控 / DMX
 通道: 12
 外箱规格: 560x467x366mm (8台)
 净重/毛重: 11.3/13.7千克

B102RGB/4

560mW 4-eyes (RGBV) Laser

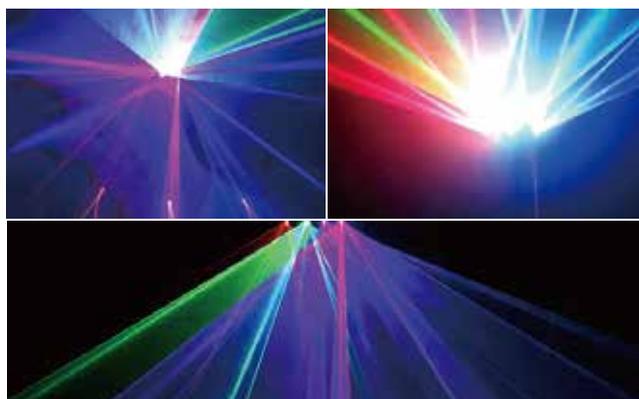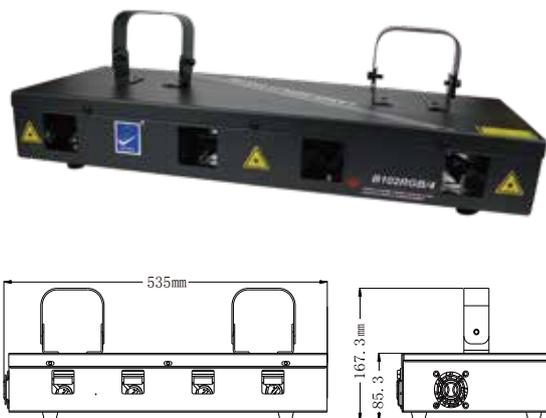



Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Laser Power: R \geq 120mW; G \geq 40mW; B \geq 400mW
 Scanner Angle: $\pm 22^\circ$
 Control Mode: Auto/Sound/DMX
 DMX Channels: 15CH
 Carton Size: 620x295x380mm (2Pcs)
 N.W./G.W.: 11.8/13.8Kg

技术参数:

电压: AC100V-240V 50-60HZ
 激光功率: R \geq 120mW; G \geq 40mW; B \geq 400mW
 扫描角度: $\pm 22^\circ$
 控制模式: 自走 / 声控 / DMX
 通道: 15
 外箱规格: 620x295x380mm (2台)
 净重/毛重: 11.8/13.8千克

K800 80mW (RG) Laser

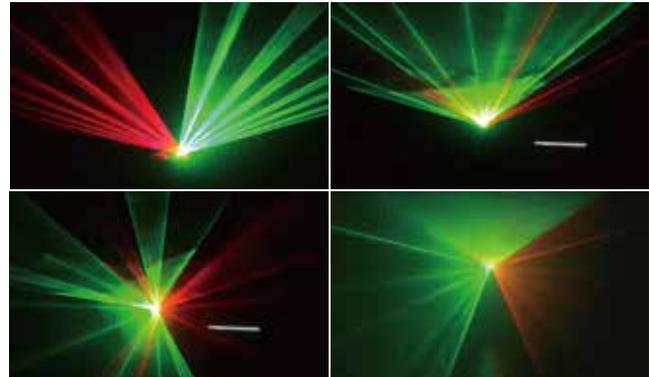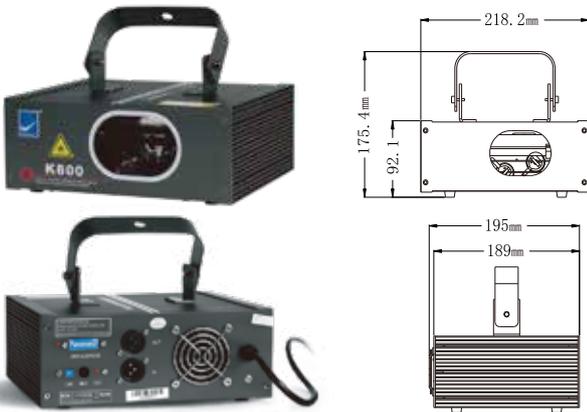


Technical Specifications:

Voltage: AC100V-240V 50-60HZ
Laser Power: R≥60mW; G≥20mW
Scanner Angle: ±18°
Control Mode: Auto/Sound/DMX
DMX Channels: 10CH
Carton Size: 500x300x355mm (4Pcs)
N.W./G.W.: 7.9/8.7Kg

技术参数:

电压: AC100V-240V 50-60HZ
激光功率: 红≥60mW; 绿≥20mW
扫描角度: ±18°
控制模式: 自走 / 声控 / DMX
通道: 10
外箱规格: 500x300x355mm (4台)
净重/毛重: 7.9/8.7千克

SD3W-RGB / SD10000+RGB 3W/1W Full Color Animation Laser--Pure LD

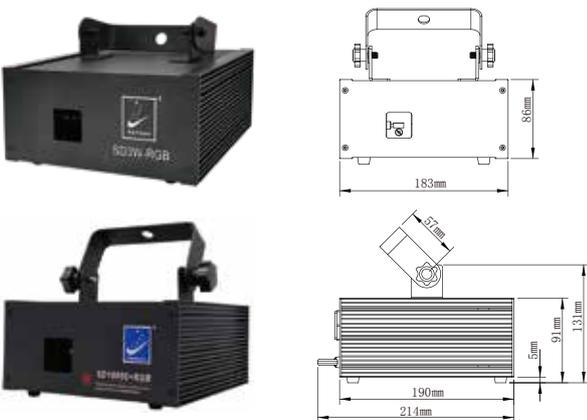

Technical Specifications:



Voltage: AC100V-240V 50-60HZ
Laser Power:
R 600mW; G 900mW; B 1500mW (SD3W-RGB)
R 200mW; G 150mW; B 600mW (SD10000+RGB)
Rated Power: 30W (SD3W-RGB)/18.5W (SD10000+RGB)
Wave length: R 638nm; G 520nm; B 440nm
Scanner Angle: ±20°
Control Mode: Auto/Sound/DMX/Master-slaved/TF Card
DMX Channels: 15CH
Carton Size: 475x270x370mm (4Pcs)
N.W./G.W.: 9/11Kg

技术参数:

电压: AC100V-240V 50-60HZ
激光功率:
红 600mW; 绿 900mW; 蓝 1500mW (SD3W-RGB)
红 200mW; 绿 150mW; 蓝 600mW (SD10000+RGB)
额定功率: 30W (SD3W-RGB)/18.5W (SD10000+RGB)
激光波长: 红 638nm; 绿 520nm; 蓝440nm
振镜角度: ±20°
控制模式: 自走 / 声控 / DMX / 主从联机 / TF卡
通道: 15
外箱规格: 475x270x370mm (4台)
净重/毛重: 9/11千克

KM002RGB

180mW (RGB) Motor Laser

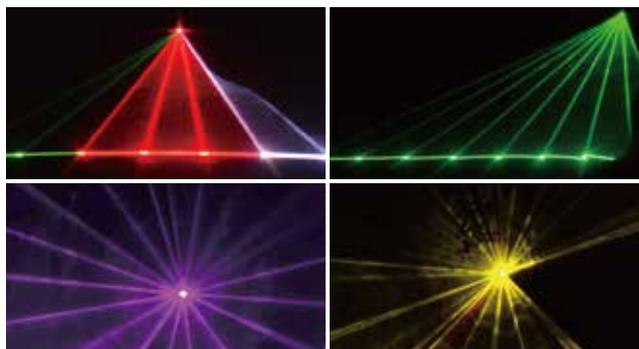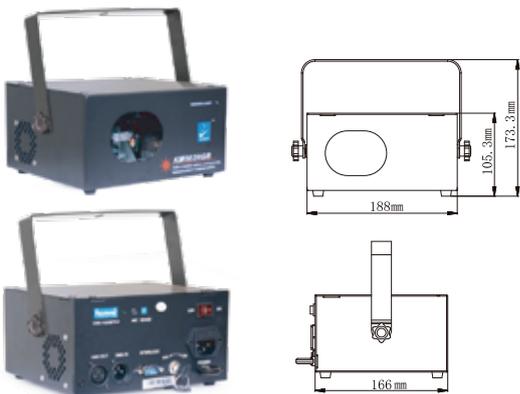

Technical Specifications:



Voltage: AC100V-240V 50-60HZ
 Laser Power: R \geq 100mW; G \geq 30mW; B \geq 50mW
 Scanner Angle: $\pm 18^\circ$
 Control Mode: Auto/Sound/DMX
 DMX Channels: 12CH
 Carton Size: 492x275x390mm (4Pcs)
 N.W./G.W.: 5.5/8.8Kg

技术参数:

电压: AC100V-240V 50-60HZ
 激光功率: 红 \geq 100mW; 绿 \geq 30mW; 蓝 \geq 50mW
 扫描角度: $\pm 18^\circ$
 控制模式: 自走 / 声控 / DMX
 通道: 12
 外箱规格: 492x275x390mm (4台)
 净重/毛重: 5.5/8.8千克

KM003RGB

180mW (RGB) Laser

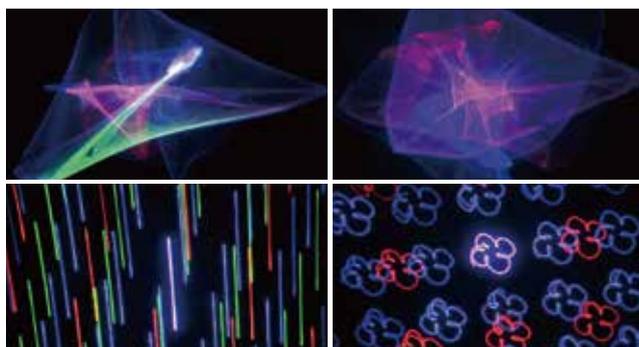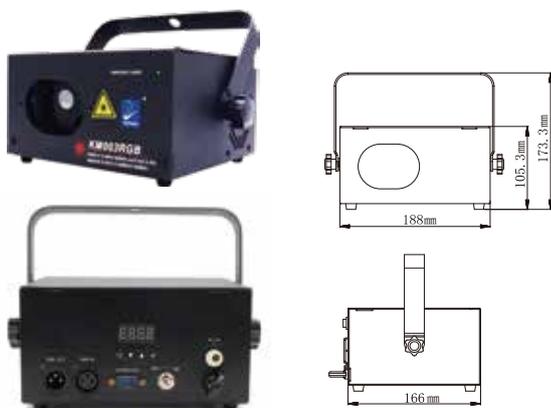

Technical Specifications:

Voltage: AC100V-240V 50-60HZ
 Laser Power: R \geq 100mW; G \geq 30mW; B \geq 50mW
 Scanner Angle: $\pm 18^\circ$
 Control Mode: Auto/Sound/DMX/Master-slave
 DMX Channels: 15CH
 Carton Size: 492x275x390mm (4Pcs)
 N.W./G.W.: 5.5/8.8Kg

技术参数:

电压: AC100V-240V 50-60HZ
 激光功率: 红 \geq 100mW; 绿 \geq 30mW; 蓝 \geq 50mW
 扫描角度: $\pm 18^\circ$
 控制模式: 自走 / 声控 / DMX / 主从联机
 通道: 15
 外箱规格: 492x275x390mm (4台)
 净重/毛重: 5.5/8.8千克